


|  |                        |  |
|--|------------------------|--|
| WAAS<br>CH <b>50211</b><br><b>W13A</b> | APP CRS<br><b>126°</b> | Rwy Idg <b>11802</b><br>TDZE <b>190</b><br>Apt Elev <b>190</b> |
|--|------------------------|--|

# RNAV (GPS) RWY 13



CASTLE (MER)

|  |        |  |
|--|--------|--|
| RNP APCH.  | ALSF-1 | MISSED APPROACH: Climb to 600 then climbing left turn to 4000 direct TURLO and hold, continue climb-in-hold to 4000. |
| <p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. For inoperative ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, increase LNAV Cats A/B visibility to 1 SM, and increase LNAV Cat C/D visibility to 1½ SM.</p> |        |  |

|                        |  |   |                           |                         |              |
|------------------------|--|---|---------------------------|-------------------------|--------------|
| ATIS<br><b>124,475</b> | NORCAL APP CON<br><b>120,95 269,45</b> | CASTLE TOWER ★<br><b>118,175 (CTAF) 235,775</b> | GND CON<br><b>133,575</b> | UNICOM<br><b>122,95</b> | <b>123.0</b> |
|------------------------|--|---|---------------------------|-------------------------|--------------|

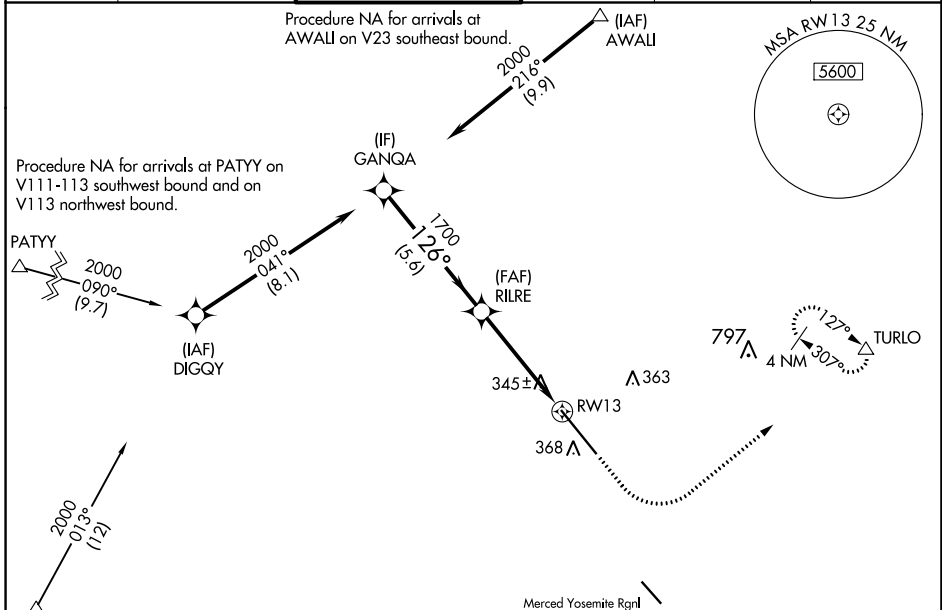

|          |          |
|----------|----------|
| ELEV 190 | TDZE 190 |
|----------|----------|

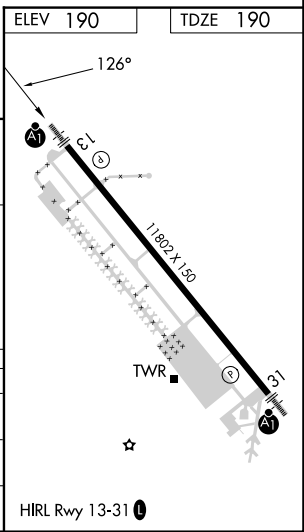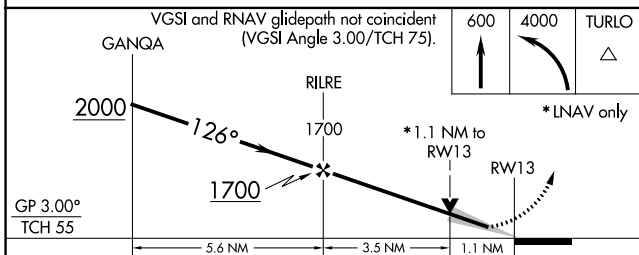

| CATEGORY     | A | B     | C           | D |
|--------------|---|-------|-------------|---|
| LPV DA       |   | 390-¾ | 200 (200-¾) |   |
| LNAV/VNAV DA |   | 655-1 | 465 (500-1) |   |
| LNAV MDA     |   | 600-¾ | 410 (500-¾) |   |

SW-2, 28 NOV 2024 to 26 DEC 2024

SW-2, 28 NOV 2024 to 26 DEC 2024