


| | | |
|--|------------------------|--|
| WAAS CH 61199 W18A | APP CRS 181° | Rwy Idg TDZE Apt Elev 6000 402 402 |
|--|------------------------|--|

RNAV (GPS) RWY 18





OLIVE BRANCH/TAYLOR FLD (OLV)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Memphis Intl altimeter setting and increase all DA 32 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility 1/8 mile and Circling Cats C and D visibility 1/4 mile.

MALS 

MISSED APPROACH: Climb to 2000 direct DOCAP and hold.

| | | | | | | |
|------------------------|---------------------------------------|---|-------------------------|--------------------------|---|-------------------------|
| ATIS 119.925 | MEMPHIS APP CON 125.8 338.3 | OLIVE BRANCH TOWER ★ 125.275 (CTAF) 0 | GND CON 121.2 | CLNC DEL 121.2 | CLNC DEL 121.3 (When twr closed) | UNICOM 122.95 |
|------------------------|---------------------------------------|---|-------------------------|--------------------------|---|-------------------------|

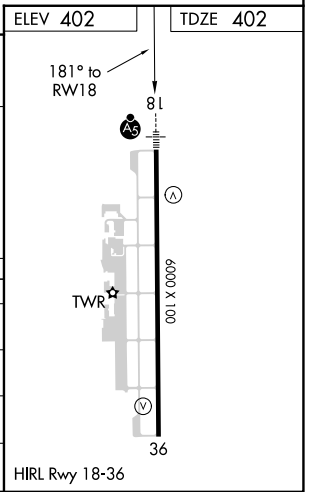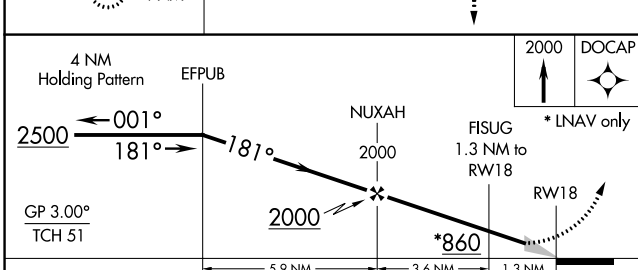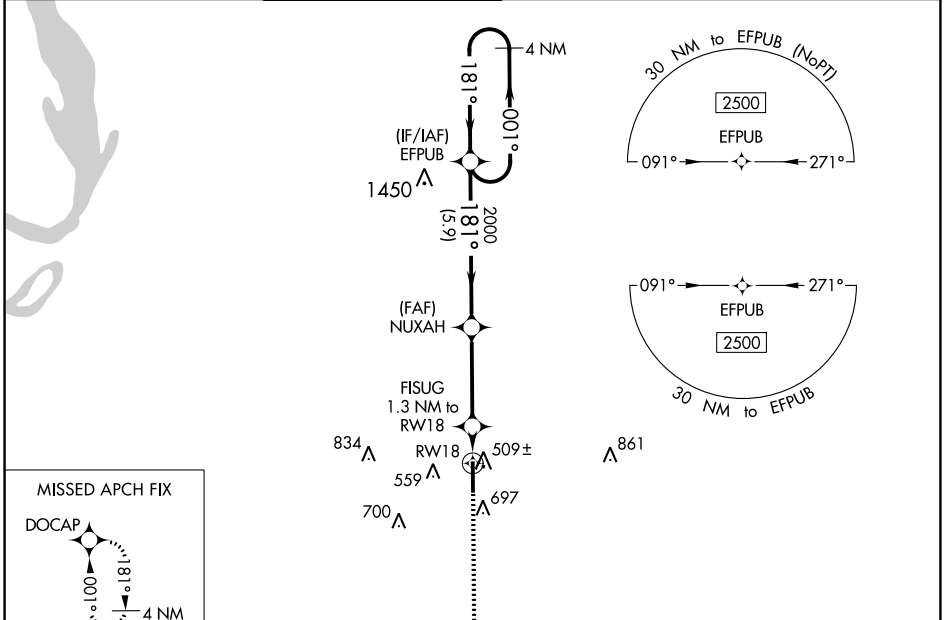

| CATEGORY | A | B | C | D |
|-------------------|---------|---------------|-------------------------------|-------------------------------|
| LPV DA | | 602-1/2 | 200 (200-1/2) | |
| LNAV/VNAV DA | | 691-1/2 | 289 (300-1/2) | |
| LNAV MDA | 760-1/2 | 358 (400-1/2) | 760-5/8 | 358 (400-5/8) |
| C CIRCLING | 1060-1 | 658 (700-1) | 1060-1 3/4 658 (700-1 3/4) | 1200-2 1/2 798 (800-2 1/2) |

SC-4, 28 NOV 2024 to 26 DEC 2024

SC-4, 28 NOV 2024 to 26 DEC 2024