ILS or LOC RWY 25

OSCODA/WURTSMITH (OSC)

LOC I-LJU	APP CRS	Rwy Idg	11800
108.5	245°	TDZE	624
		Apt Elev	633

DME required.

Circling NA southeast of Rwy 7-25. For inop ALS, increase S-LOC Cats C and D visibility to 1 SM. DME from ASP DME. Simultaneous reception of I-LJU and ASP DME required.

MALSR

MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 on heading 030° and on APN VORTAC R-175 to LEGOR/APN 15 DME and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
118.7	125.475 269.45	123.0 (CTAF) L

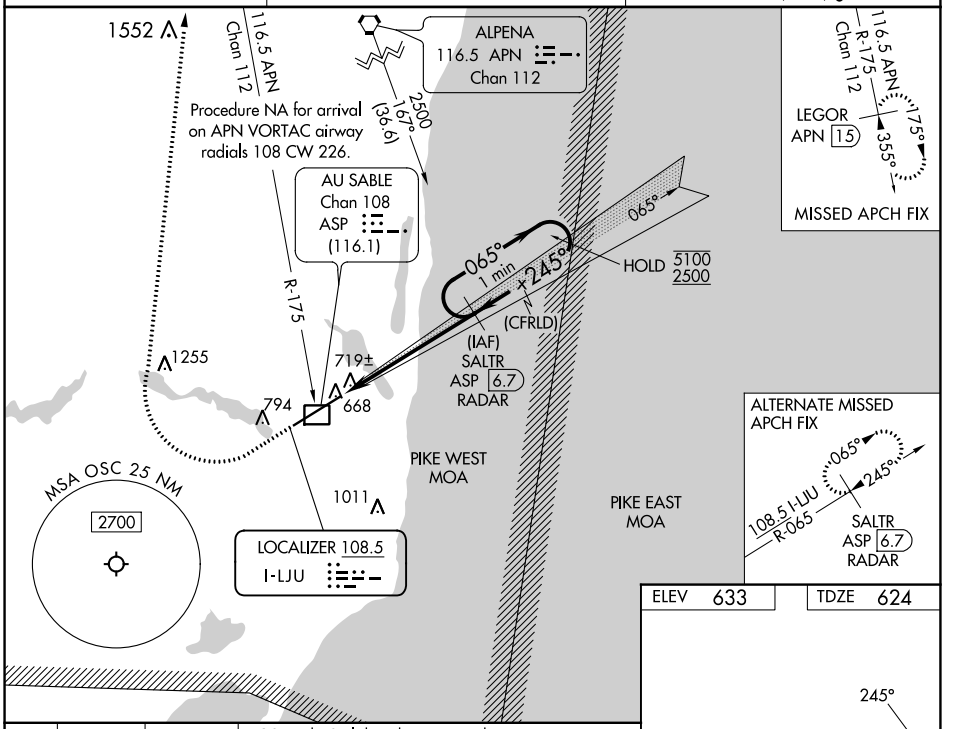

ELEV	633	TDZE	624

1300 | 3000 hdg 030° APN R-175 | LEGOR APN 15

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).

One Minute Holding Pattern

*LOC only. *ASP

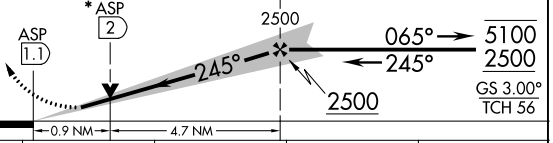



CATEGORY	A	B	C	D
S-ILS 25	824-½ 200 (200-½)			
S-LOC 25	980-½ 356 (400-½)		980-⅝ 356 (400-⅝)	
C CIRCLING	1140-1 507 (600-1)		1160-1½ 527 (600-1½)	1300-2 667 (700-2)

REIL Rwy 7 L
HIRL Rwy 7-25 L

EC-1, 26 DEC 2024 to 23 JAN 2025
EC-1, 26 DEC 2024 to 23 JAN 2025