

LOC/DME I-BLY 110.3 Chan 40	APP CRS 191°	Rwy 19R Idg 9205 TDZE 672 Apt Elev 729	Rwy 19L Idg 4182 TDZE 675 Apt Elev 729
---	------------------------	---	---

ILS or LOC RWY 19R

GENERAL MITCHELL INTL (MKE)


RADAR required for procedure entry, RADAR or DME required for LOC only.

▼ For inop HALS, increase visibility to 1 mile.
RVR 1800 authorized with use of FD or AP or HUD to DA.



MALSR Rwy 19R

MISSED APPROACH: Climb to 2800 then right turn direct BAE VOR/DME and hold.

D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125	CLNC DEL 120.8	CPDLC
------------------------	---	--	---------------------------------	--------------------------	-------

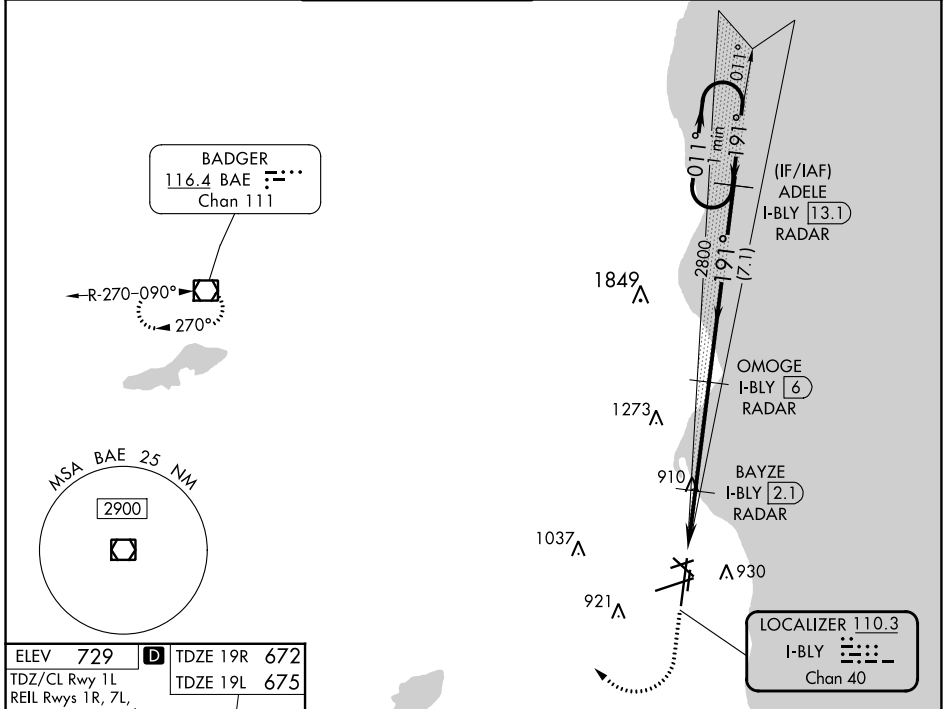

ELEV 729	D	TDZE 19R 672
TDZ/CL Rwy 1L		TDZE 19L 675
REIL Rwys 1R, 7L, 13, 25L, 25R, and 31		

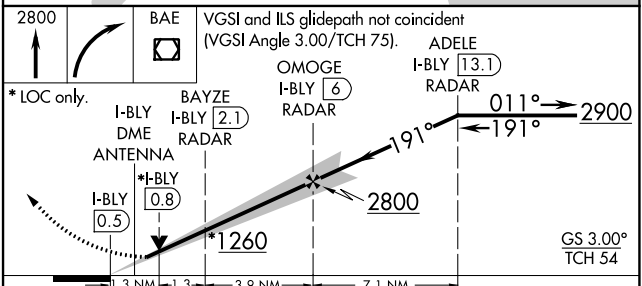

CATEGORY	A	B	C	D
S-ILS 19R#	872/24 200 (200-1/2)			
S-LOC 19R	1160/24	488 (500-1/2)	1160/50	488 (500-1)
SIDESTEP 19L	1160-1	485 (500-1)	1160-1/2 485 (500-1/2)	1160-2 485 (500-2)
C CIRCLING	1240-1	511 (600-1)	1240-1/2 511 (600-1/2)	1360-2 631 (700-2)

EC-3, 26 DEC 2024 to 23 JAN 2025

EC-3, 26 DEC 2024 to 23 JAN 2025