RNAV (RNP) W RWY 35R

RENO/TAHOE INTL (RNO)

APP CRS	Rwy Idg	9000
347°	TDZE	4408
	Apt Elev	4415

RNP AR APCH - GPS.

T A -13°C

For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 34°C .

MISSED APPROACH: Climb to 11000 on track 347° to HOGBO and on track 345° to TAKLE and hold, continue climb-in-hold to 11000.
*Missed approach requires minimum climb of 301 feet per NM to 7150.

D-ATIS	NORCAL APP CON	RENO TOWER	GND CON	CLNC DEL	CPDLC
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6	124.9 370.85	

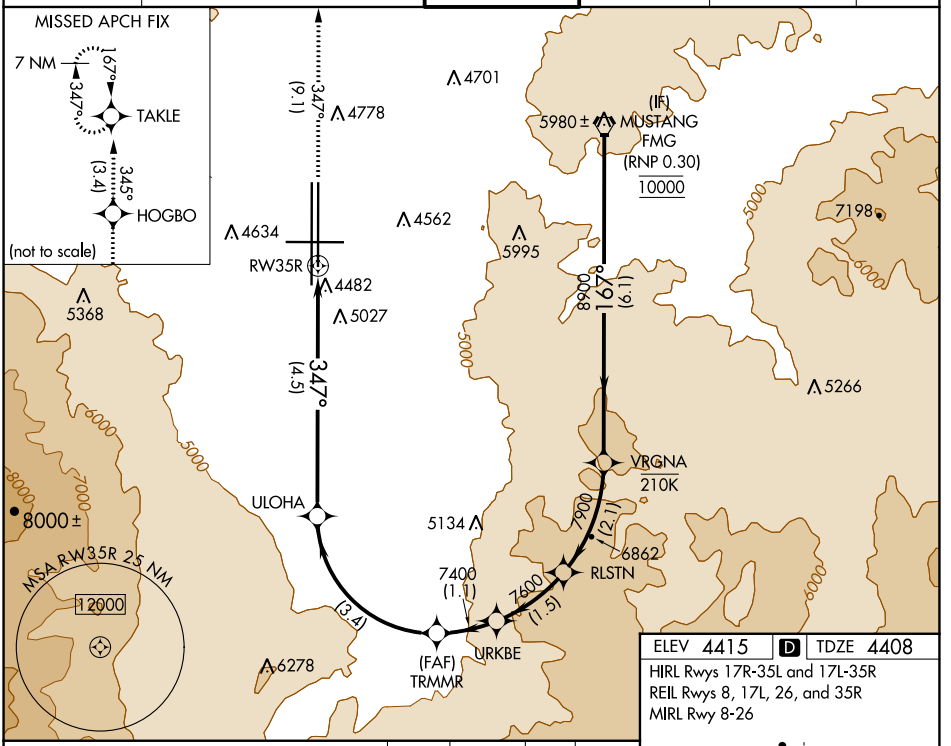

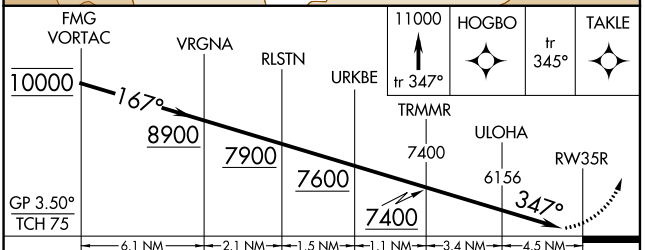

CATEGORY	A	B	C	D
RNP 0.11 DA*	4762-1 354 (400-1)			
RNP 0.30 DA	5349-2½ 941 (1000-2½)			

AUTHORIZATION REQUIRED

ELEV 4415 D TDZE 4408

HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 8, 17L, 26, and 35R
MIRL Rwy 8-26

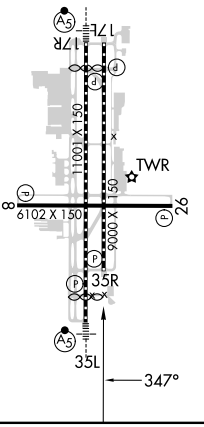

SW-4, 26 DEC 2024 to 23 JAN 2025
SW-4, 26 DEC 2024 to 23 JAN 2025