


WAAS CH 66100 W13A	APP CRS 132°	Rwy Idg 12803 TDZE 1066 Apt Elev 1078
--	------------------------	--

RNAV (GPS) RWY 13


TOPEKA RGNL (F0E)

RNP APCH.	MALSF	MISSED APPROACH: Climb to 3000 direct ERJAG and hold.
<p>When local altimeter setting not received, use Philip Billard Muni altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cals visibility 1/8 SM, LNAV Cat C visibility 1/8 SM and Circling Cat D visibility 1/4 SM. Baro-VNAV and VDP NA when using Philip Billard Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.</p>		

ATIS 128.25	KANSAS CITY CENTER 123.8 343.7	FORBES TOWER* 120.8 (CTAF) 340.2	GND CON 118.425 275.8	UNICOM 122.95
-----------------------	--	--	---------------------------------	-------------------------

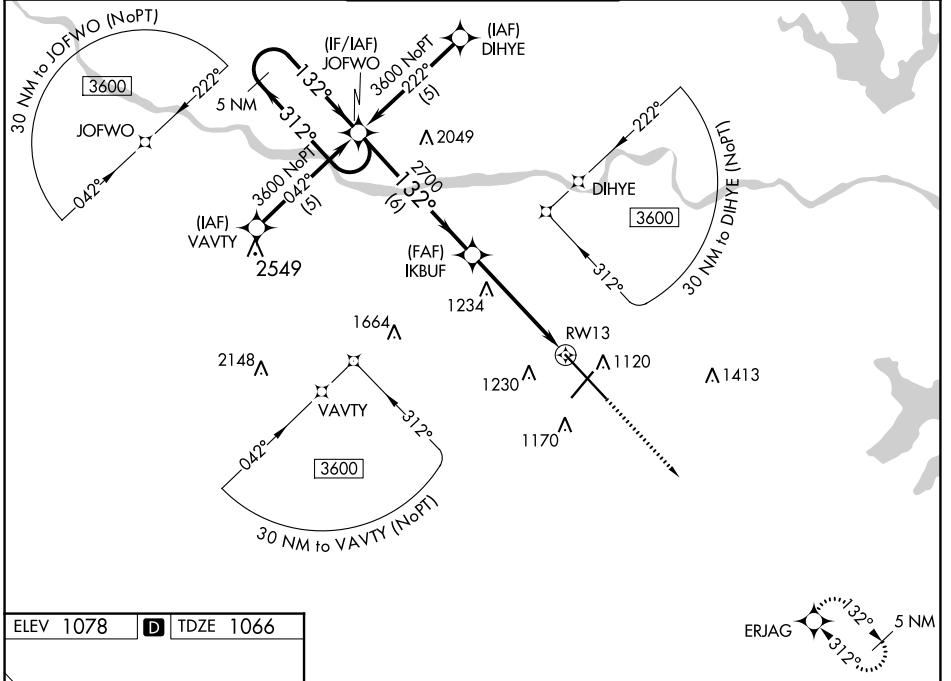

ELEV 1078	D	TDZE 1066
-----------	----------	-----------



REIL Rwy 3, 13 and 21
MIRL Rwy 3-21
HIRL Rwy 13-31

5 NM Holding Pattern		JOFWO	IKBUF	RWY 13	ERJAG
3600		312°	132°	2700	3000
GP 3.00°		6 NM		3.6 NM	1.3 NM
TCH 52		*1.3 NM to RWY 13		*INAV only.	
CATEGORY	A	B	C	D	
LPV DA		1316-3/4	250 (300-3/4)		
LNAV/VNAV DA		1506-1 1/2	440 (500-1 1/2)		
LNAV MDA	1540-1	474 (500-1)	1540-1 3/8 474 (500-1 3/8)	1540-1 1/2 474 (500-1 1/2)	
C CIRCLING	1540-1 462 (500-1)	1580-1 502 (600-1)	1580-1 1/2 502 (600-1 1/2)	1700-2 622 (700-2)	