

LOC I-JBD 108.95	APP CRS 053°	Rwy Idg 5342 TDZE 124 Apt Elev 125
----------------------------	------------------------	---

ILS or LOC RWY 5




LUMBERTON RGNL (LBT)

ADF required.

When local altimeter setting not received, use Maxton altimeter setting and increase DA to 416 feet and all visibility $\frac{1}{8}$ SM; increase all MDA to 60 feet and S-LOC 5 visibility Cat C $\frac{1}{8}$ SM and Circling visibility Cat C $\frac{1}{4}$ SM. Circling Rwy 13, 31 NA at night. Autopilot coupled approach NA below 1250.

MISSED APPROACH: Climb to 1000 then climbing right turn to 1900 direct JIGEL LOM and hold.

ASOS 134.775	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

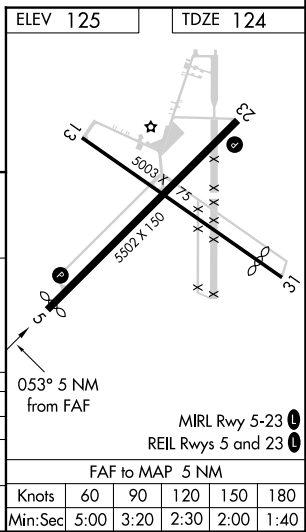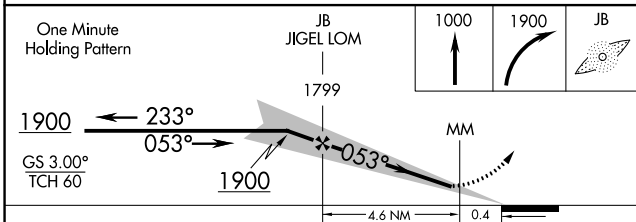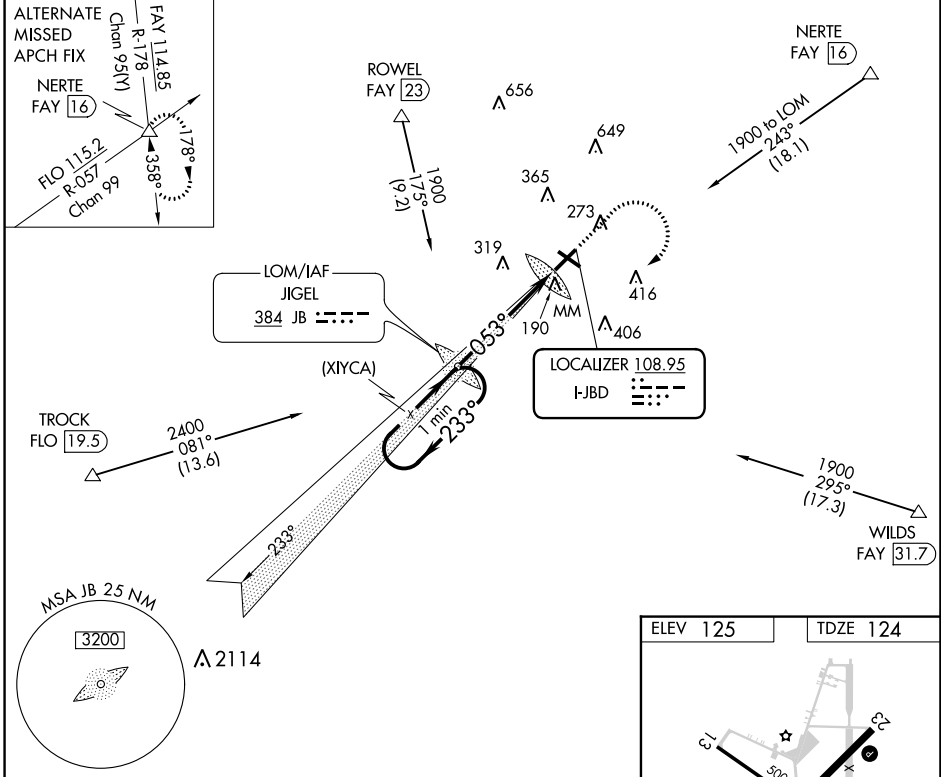

CATEGORY	A	B	C	D
S-ILS 5		360-3/4 236 (300-3/4)		NA
S-LOC 5	600-1	476 (500-1)	600-1 3/8 476 (500-1 3/8)	NA
CIRCLING	660-1	535 (600-1)	720-1 1/2 595 (600-1 1/2)	NA

ELEV 125	TDZE 124				
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

SE-2, 26 DEC 2024 to 23 JAN 2025

SE-2, 26 DEC 2024 to 23 JAN 2025