MARIETTA, GEORGIA

ILS or LOC RWY 29

LOC I-VRW	APCH CRS	Rwy ldg 10,002 / TDZE 1014 / Arpt Elev 1069
111.35	289°	[USAF] DOBBINS ARB (KMGE)

TACAN or RADAR required.

▼ * When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1⅜ miles.
** Circling not authorized N of Rwy 11-29 for CAT DE aircraft. Circling to assault strip not authorized.

SALSF A2

† MISSED APPROACH: Climb to 3000 on DOB TACAN R-286 to CYLON and hold.

ATIS ★	ATLANTA APP CON	TOWER ★	GND CON	ASR
269.5	121.0 268.7	120.75 370.875	125.3 275.8	

† Missed approach requires use of RNAV or ATC RADAR monitoring.

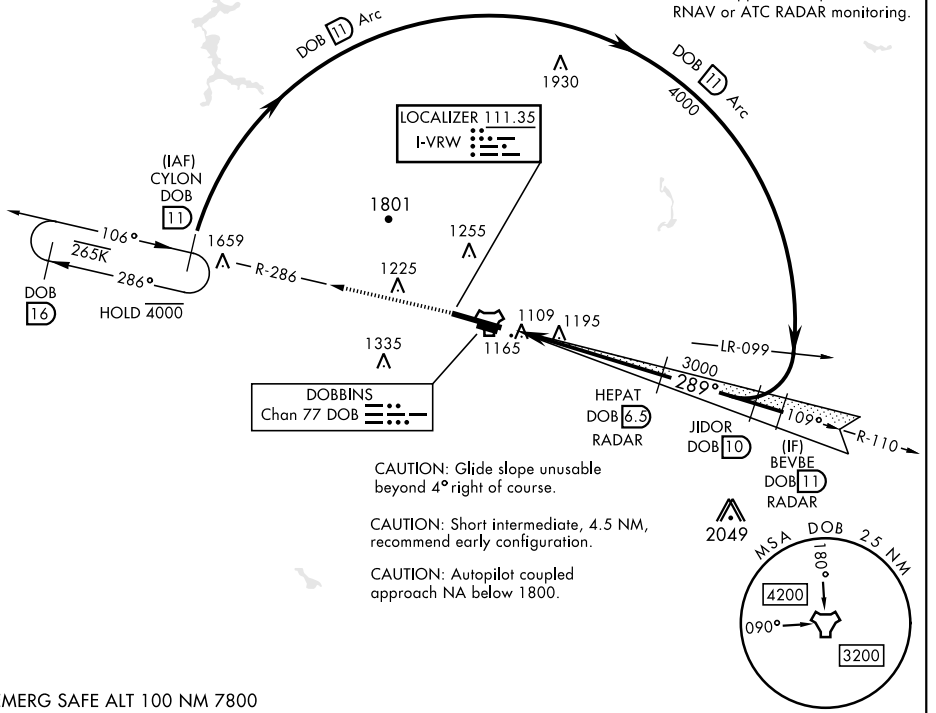

EMERG SAFE ALT 100 NM 7800

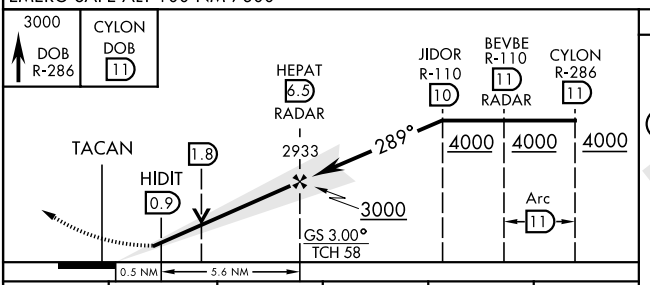

ELEV 1069 TDZE 1014



HIRL Rwy 11-29
REIL Rwy 11 and 29

CATEGORY	A	B	C	D	E
S-ILS 29	1214/40		200	(200-¾)	
S-LOC 29*	1520/40	506 (500-¾)	1520-1¼	506	(500-1¼)
** C CIRCLING	1580-1 511 (600-1)	1620-1 551 (600-1)	1760-2 691 (700-2)	1760-2¼ 691 (700-2¼)	1760-2½ 691 (700-2½)

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

SE-4, 26 DEC 2024 to 23 JAN 2025
SE-4, 26 DEC 2024 to 23 JAN 2025