


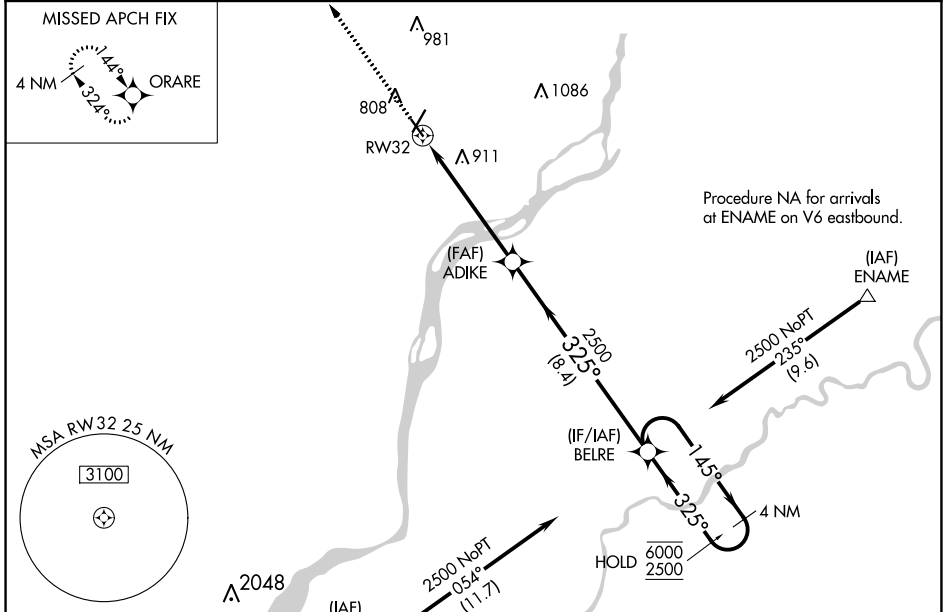
| | | | |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS CH 77629 W32A | APP CRS 325° | Rwy Idg TDZE Apt Elev | 4200 697 708 |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 32

CLINTON MUNI (CWI)


| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| RNP APCH. | MISSED APPROACH: Climb to 2500 direct ORARE and hold. |
|  <p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.</p> | |

| | | | |
|----------------------------|--------------------------------------------|----------------------------|-------------------------------|
| AWOS-3PT 125.525 | QUAD CITY APP CON * 125.95 257.8 | CLNC DEL 118.5 0 | UNICOM 122.8 (CTAF) |
|----------------------------|--------------------------------------------|----------------------------|-------------------------------|



| | | |
|----------|----------|----------|
| ELEV 708 | D | TDZE 697 |
|----------|----------|----------|

REIL Rwys 14 and 21
MIRL Rwy 14-32
HIRL Rwy 3-21

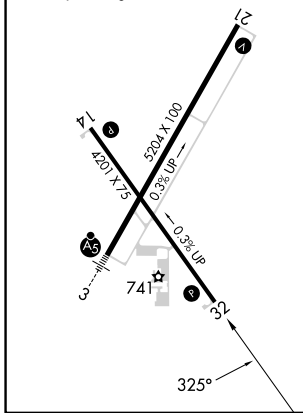

| | | | | |
|-------------|-----------------|-------|-------|----------------------|
| 2500 | ORARE | ADIKE | BELRE | 4 NM Holding Pattern |
| *LNAV only. | | | | |
| | *1.4 NM to RW32 | | | |
| | | | | |
| | | | | |

| CATEGORY | A | B | C | D |
|-------------------|------------------------------------|------------------------------------------|--------------------------------------------------------------------------------|----|
| LPV DA | 947-1 | 250 (300-1) | | NA |
| LNAV/VNAV DA | 1205-1 ³ / ₈ | 508 (500-1 ³ / ₈) | | NA |
| LNAV MDA | 1180-1 | 483 (500-1) | 1180-1 ³ / ₈ 483 (500-1 ³ / ₈) | NA |
| C CIRCLING | 1180-1 472 (500-1) | 1240-1 532 (600-1) | 1240-1 ¹ / ₂ 532 (600-1 ¹ / ₂) | NA |