

APP CRS	Rwy Idg	5007
181°	TDZE	314
	Apt Elev	319

RNAV (GPS) RWY 18

RALPH C WEISER FLD (AGO)


RNP APCH - GPS.

▼ When local altimeter setting not received, use El Dorado altimeter setting and increase all MDAs 60 feet. VDP NA with El Dorado altimeter setting. Rwy 18 helicopter visibility reduction below ¾ SM NA.

▲ NA

MISSED APPROACH: Climb to 2000 direct REPAE and hold.

AWOS-3 118.05	FORT WORTH CENTER 128.2 269.1	UNICOM 122.8 (CTAF) 0
-------------------------	---	---------------------------------

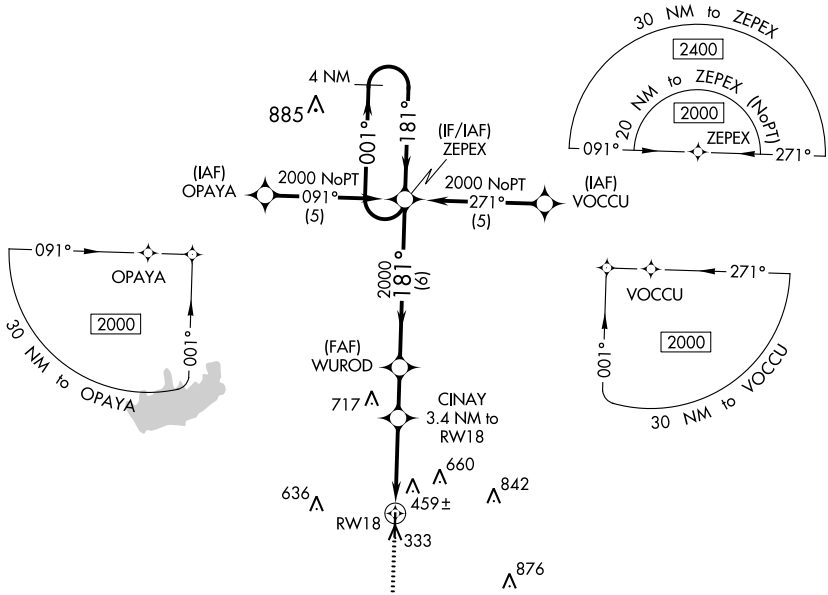

ELEV 319	TDZE 314
----------	----------

181° to RW18

81

0.4% UP

5007 X 100

36

MIRL Rwy 18-36

REIL Rwy 18 and 36

MISSED APCH FIX

REPAE

4 NM Holding Pattern

2000

REPAE

WUROD

ZEPEX

181°

001°

2000

181°

1.2 NM to RW18

3.4 NM to RW18

1.2

2.2 NM

1.8 NM

6 NM

1400

3.05°

TCH 40

CATEGORY	A	B	C	D
LNAV MDA	980-1	666 (700-1)	980-1 7/8 666 (700-1 7/8)	NA
CIRCLING	980-1	661 (700-1)	980-1 7/8 661 (700-1 7/8)	NA

SC-1, 26 DEC 2024 to 23 JAN 2025

SC-1, 26 DEC 2024 to 23 JAN 2025