

WAAS CH 78115 W18A	APP CRS 185°	Rwy Idg TDZE Apt Elev	5001 454 458
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18




PHILADELPHIA MUNI (MPPE)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

⚠ When local altimeter setting not received, use Key Fld altimeter setting and increase all DA 101 feet and all MDA 120 feet and increase LPV all Cats, LNAV Cat C and Circling Cats C and D visibility ¼ mile, increase LNAV/VNAV all Cats, LNAV Cat D visibility ½ mile. Baro-VNAV and VDP NA when using Key Fld altimeter setting.

MISSED APPROACH:
Climb to 3000 direct OKDAE and hold.

AWOS-3P 118.725	MEMPHIS CENTER 132.75 263.0	UNICOM 123.0 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

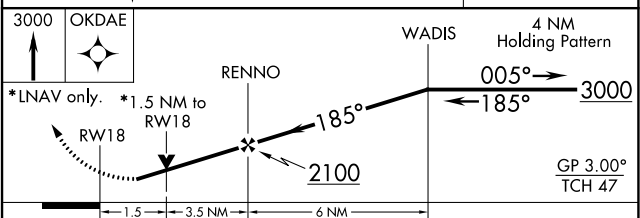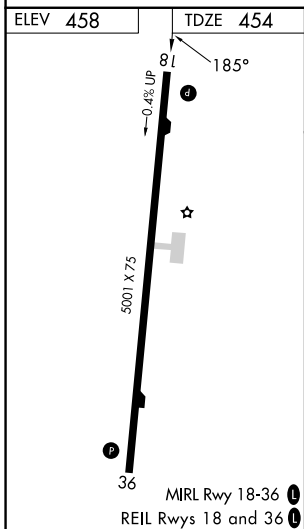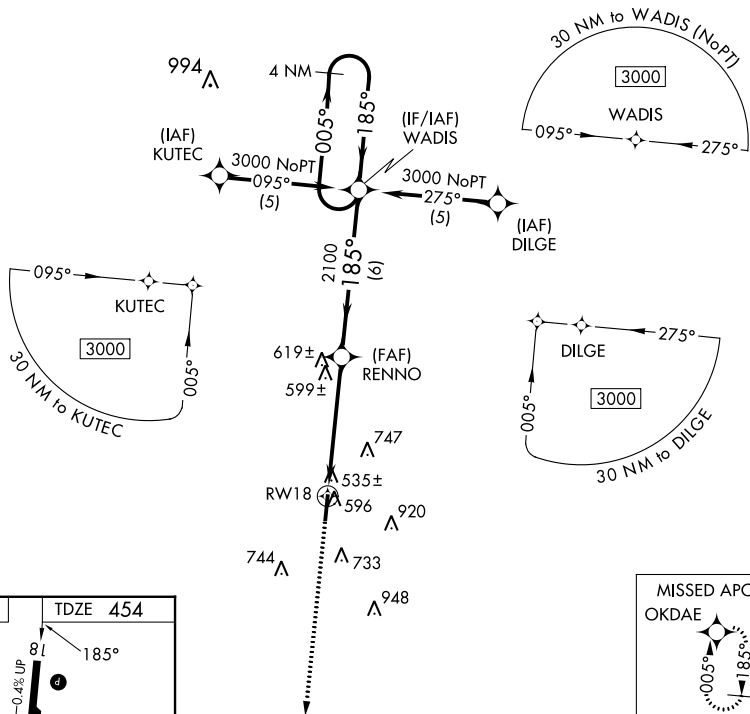

CATEGORY	A	B	C	D
LPV DA	774-1¼		320 (400-1¼)	
LNAV/VNAV DA	850-1½		396 (400-1½)	
LNAV MDA	960-1	506 (600-1)	960-1½	506 (600-1½)
CIRCLING	1060-1	602 (700-1)	1280-2½	822 (900-2¾)
			822 (900-2¾)	822 (900-2¾)

SC-4, 26 DEC 2024 to 23 JAN 2025

SC-4, 26 DEC 2024 to 23 JAN 2025