WAAS CH **45912** **W18A** | APP CRS **180°** | Rwy Idg **5905** TDZE **734** Apt Elev **734**

RNAV (GPS) RWY 18

MOUNT STERLING MUNI (I63)

RNP APCH.

Baro-VNAV NA. Rwy 18 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Quincy altimeter setting: increase Circling Cat C and D MDA 60 feet and visibility Circling Cat C and D ¼ SM.

MISSED APPROACH: Climb to 2700 direct BEWOH and hold.

AWOS-3PT	UIN ASOS	KANSAS CITY CENTER	UNICOM
118.325	**121.425**	**126.225 317.775**	**122.8** (CTAF) L

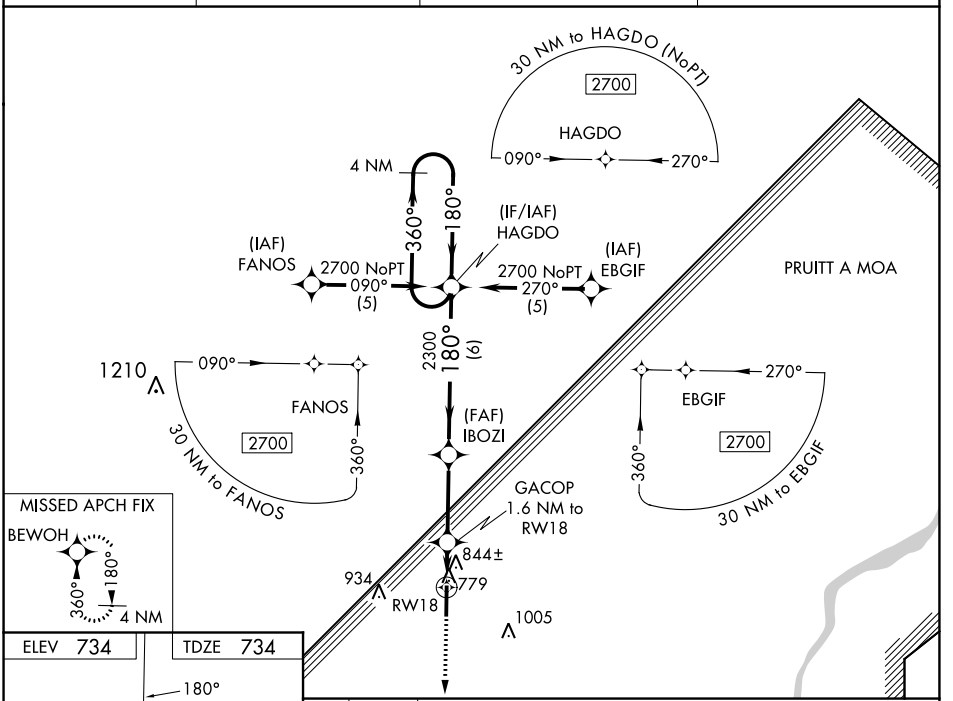

CATEGORY	A	B	C	D
LPV DA	1066-1¼ 332 (400-1¼)			
LNAV/VNAV DA	1191-1¾ 457 (500-1¾)			
LNAV MDA	1160-1 426 (500-1)		1160-1¼ 426 (500-1¼)	
CIRCLING	1200-1 466 (500-1)		1360-1¾ 626 (700-1¾)	1360-2 626 (700-2)

MIRL Rwy 18-36 L

EC-3, 26 DEC 2024 to 23 JAN 2025
EC-3, 26 DEC 2024 to 23 JAN 2025