

| | | |
|--|------------------------|---|
| WAAS CH 78000 W05A | APP CRS 047° | Rwy Idg 6601 TDZE 196 Apt Elev 196 |
|--|------------------------|---|

RNAV (GPS) RWY 5

SOUTHWEST GEORGIA RGNL (A.B.Y)



RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV Cat D visibility to RVR 6000.
 ▲ ** RVR 1800 authorized with use of FD or AP or HUD to DA.



MISSED APPROACH: Climb to 2000 direct UNIKE and left turn on track 291° to PZD VOR/DME and hold.

| | | | | |
|-----------------------|--|---|-------------------------------|-------------------------|
| ATIS 133.05 | JACKSONVILLE CENTER 125.75 363.075 | ALBANY TOWER * 120.25 (CTAF) 0336.4 | GND CON 121.9 348.6 | UNICOM 122.95 |
|-----------------------|--|---|-------------------------------|-------------------------|

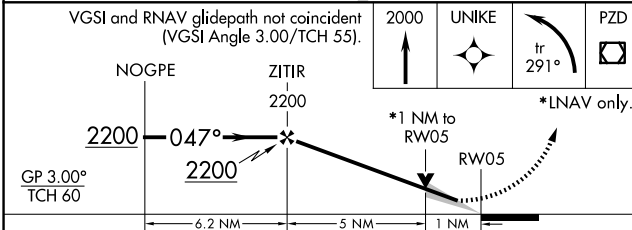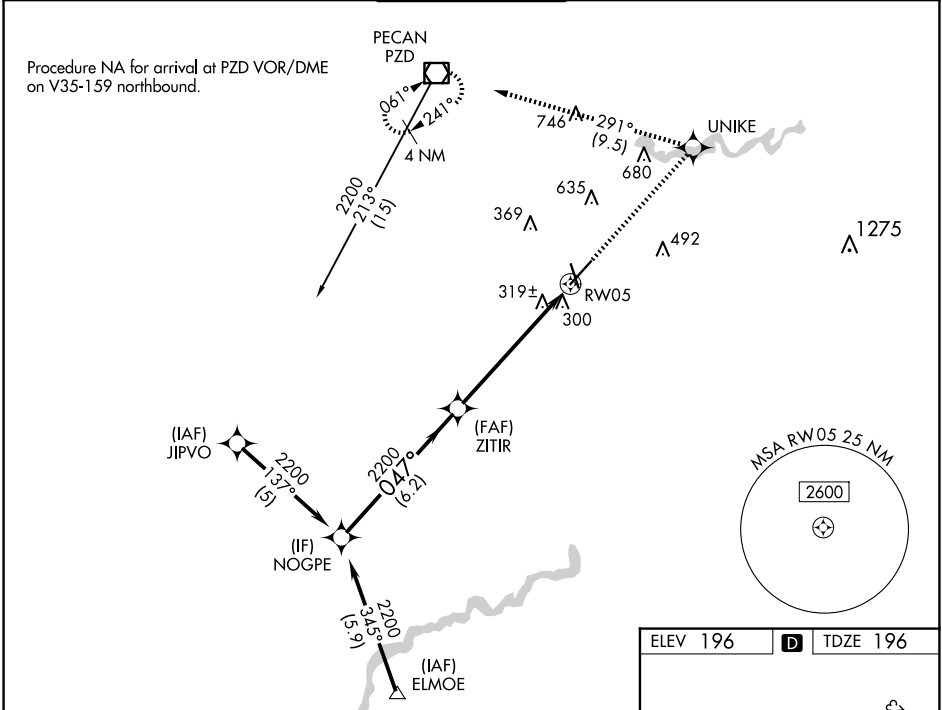

| | | |
|----------|----------|----------|
| ELEV 196 | D | TDZE 196 |
|----------|----------|----------|

HIRL Rwy 5-23
MIRL Rwy 17-35
REIL Rwy 35
REIL Rwy 17 and 23

| CATEGORY | A | B | C | D |
|-------------------|-------------|-------------|--------------|--------------|
| LPV DA** | 396/24 | | 200 (200-½) | |
| LNAV/VNAV DA | 635/50 | | 439 (500-1) | |
| LNAV MDA | 580/24 | | 384 (400-½) | |
| C CIRCLING | 640-1 | 660-1 | 940-2¼ | 940-2½ |
| | 444 (500-1) | 464 (500-1) | 744 (800-2¼) | 744 (800-2½) |

SE-4, 23 JAN 2025 to 20 FEB 2025

SE-4, 23 JAN 2025 to 20 FEB 2025