


WAAS CH 45523 W09B	APP CRS 087°	Rwy Idg TDZE 13 Apt Elev 36	9500
--	------------------------	---	-------------

RNAV (GPS) Y RWY 9L


PHILADELPHIA INTL (PHL)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 1500, then climbing right turn to 3000 direct OOD VORTAC and hold.	
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to RVR 4500, all Cats. # RVR 1800 authorized with use of FD or AP or HUD to DA.</p>				
D-ATIS ARR 133.4 DEP 135.925	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (Rwys 9L/27R, 8/26 and 17/35) 135.1 327.05 (Rwy 9R/27L)	GND CON 121.9 348.6	CLNC DEL 118.85 348.6

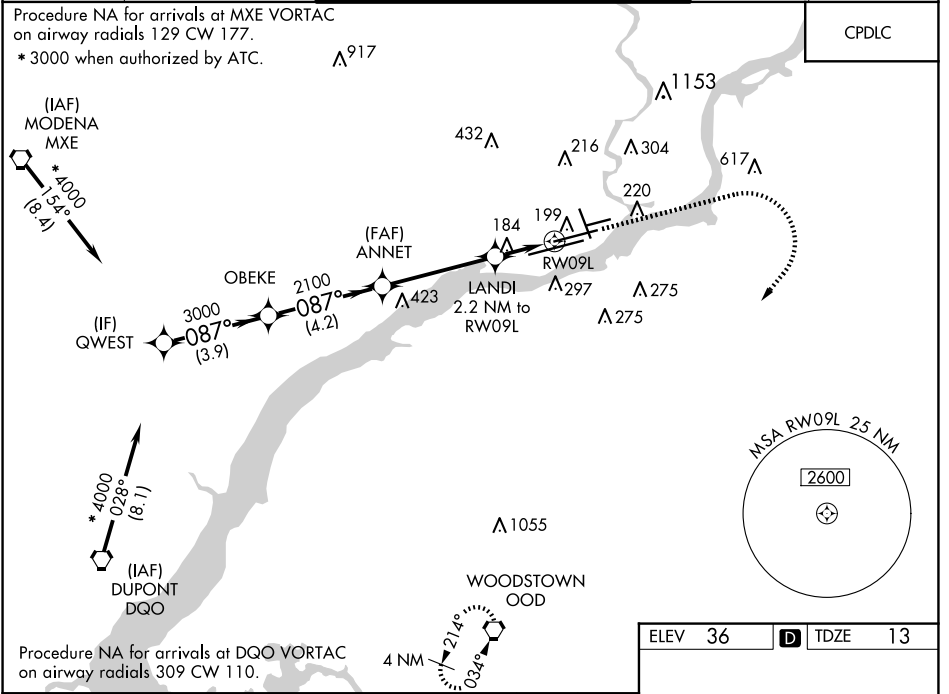

NE-4, 23 JAN 2025 to 20 FEB 2025

NE-4, 23 JAN 2025 to 20 FEB 2025

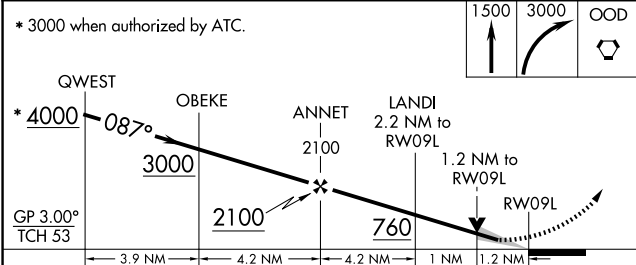

ELEV 36	D TDZE 13
---------	------------------

TDZ/CL Rwy 9R
HIRL all Rwys
REIL Rwys 9L and 35

CATEGORY	A	B	C	D
LPV DA #	213/24		200 (200-½)	
LNAV/VNAV DA	325/24		312 (300-½)	
LNAV MDA	440/24 427 (500-½)		440/40 427 (500-¾)	
C CIRCLING	540-1 504 (600-1)	600-1 564 (600-1)	620-1½ 584 (600-1½)	720-2¼ 684 (700-2¼)