ILS RWY 16L (CAT II & III)

SEATTLE-TACOMA INTL (SEA)

LOC/DME I-SNQ	APP CRS	Rwy Idg	11901
110.3	164°	TDZE	432
Chan 40		Apt Elev	432

DME or RADAR required. RNP APCH-GPS, from GRIFY.

Simultaneous approach authorized. Cat II: RVR 1000 authorized with specific OPSPEC, MSPEC, or LOA approval and use of Autoland or HUD to touchdown.

ALSF-2

MISSED APPROACH: Climb to 900 on heading 165° then on SEA VORTAC R-161 to cross TEBNE/SEA 2.4 DME/RADAR at or below 2000 then climb to 5000 on SEA VORTAC R-161 to MILLT/SEA 11 DME/RADAR and hold, continue climb-in-hold to 5000.

D-ATIS	SEATTLE APP CON	SEATTLE TOWER	GND CON	CLNC DEL	CPDLC
118.0	133.65 273.45	119.9 239.3 (Rwys 16L, 16C, 34C, 34R) 120.95 239.3 (Rwys 16R, 34L)	121.7	128.0	

PAINE 110.6 PAE Chan 43

7000 to ZEDKI 169° (7)

MSA SEA 25 NM: 3400 (180°–070°), 6400 (070°–340°), 2200 (340°–180°)

(IAF) ZEDKI I-SNQ 22.3 RADAR

(IAF) GRIFY 6000 210K

(IAF) WUMUL I-SNQ 19.1 RADAR

(IAF) KENMO I-SNQ 15.9 RADAR

4000 to HELZR 136° (8.3)

(IF) HELZR I-SNQ 12.8 RADAR

KARFO I-SNQ 10.3 RADAR

DGLAS I-SNQ 6.2 RADAR

SEATTLE 116.8 SEA Chan 115

Boeing Fld/ King County Intl

LOCALIZER 110.3 I-SNQ Chan 40

ALTERNATE MISSED APCH FIX

113.4 OLM R-048 Chan 81 048° 228° PEYOY OLM 20

MISSED APCH FIX

MILLT SEA 11 RADAR 161° 341° Chan 115 116.8 SEA R-161

TEBNE SEA 2.4 RADAR 2000

R-161

3440 4384 1745 2164 3149 833 542± 3517 2200 581

ELEV 432 D TDZE 432

900	SEA R-161	TEBNE SEA 2.4 2000	5000	SEA R-161	MILLT SEA 11
hdg 165°					

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 76).

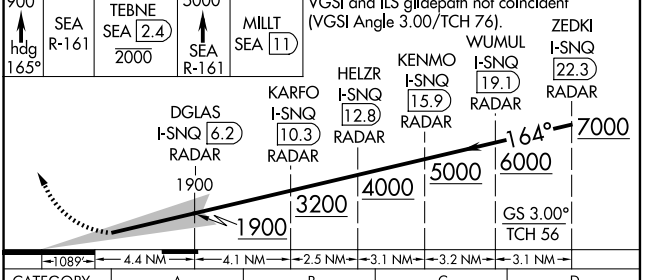

CATEGORY	A	B	C	D
S-ILS 16L	NA	CAT II RA 176/12 100 DA 532		
S-ILS 16L	NA	CAT III RVR 03		

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

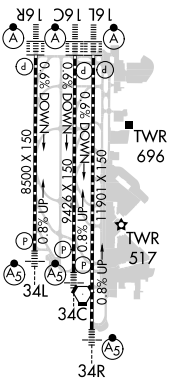

HIRL all Rwys
TDZ/CL Rwys 16L, 16C, 16R and 34R

NW-1, 23 JAN 2025 to 20 FEB 2025
NW-1, 23 JAN 2025 to 20 FEB 2025