


MIAMI, FLORIDA
MIAMI INTL (MIA)MIAMI INTL (MIA)
MIAMI, FLORIDA

NOTE: Chart not to scale.

Rwys 26L/R, 27, 30: Standard.
Rwy 8L: Standard with minimum climb of 274'/NM to 1400.
Rwy 8R: Standard with minimum climb of 294'/NM to 1400.
Rwy 9: Standard with minimum climb of 295'/NM to 1400.
Rwy 12: Standard with minimum climb of 289'/NM to 1400.

GWAVA, KETLL, MAYNR
D-ATIS
133.675
CLNC DE
135.33
CPDLG
GND COM
121.8 348.8
(Rwys 8L/R, 12, 26L/R)
127.5 348.8
(Rwys 9, 27, 30)
MIAMI TOWER
118.3 256.9

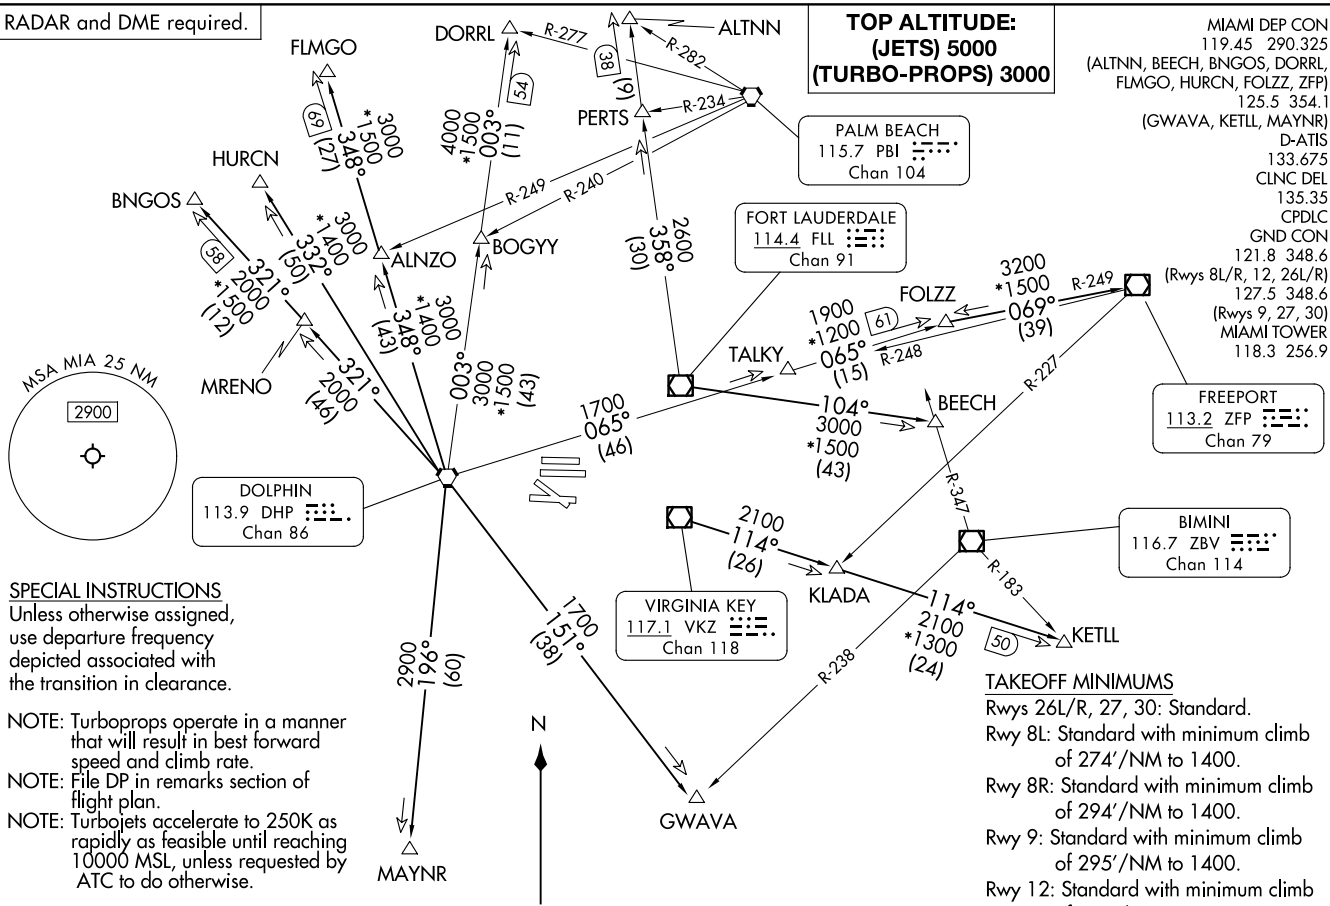



DEPARTURE ROUTE DESCRIPTION

TAKEOFF ALL RUNWAYS: Climb on assigned heading for RADAR vectors to assigned transition. Jets climb and maintain 5000, props and turboprops climb and maintain 3000. Expect filed altitude 10 minutes after departure.

ALTNN TRANSITION (MIA2.ALTNN): From over FLL VOR/DME on FLL R-358 to ALTNN.

BEECH TRANSITION (MIA2.BEECH): From over FLL VOR/DME on FLL R-104 to BEECH.

BNGOS TRANSITION (MIA2.BNGOS): From over DHP VORTAC on DHP R-321 to BNGOS.

DORRL TRANSITION (MIA2.DORRL): From over DHP VORTAC on DHP R-003 to DORRL.

FLMGO TRANSITION (MIA2.FLMGO): From over DHP VORTAC on DHP R-348 to FLMGO.

FOLZZ TRANSITION (MIA2.FOLZZ): From over DHP VORTAC on DHP R-065 to FOLZZ.

FREEPORT TRANSITION (MIA2.ZFP): From over DHP VORTAC on DHP R-065 to FOLZZ then on ZFP R-249 to ZFP VOR/DME.

GWAVA TRANSITION (MIA2.GWAVA): From over DHP VORTAC on DHP R-151 to GWAVA.

HURCN TRANSITION (MIA2.HURCN): From over DHP VORTAC on DHP R-332 to HURCN.

KETLL TRANSITION (MIA2.KETLL): From over VKZ VOR/DME on VKZ R-114 to KETLL.

MAYNR TRANSITION (MIA2.MAYNR): From over DHP VORTAC on DHP R-196 to MAYNR.

SE-3, 20 FEB 2025 to 20 MAR 2025

SE-3, 20 FEB 2025 to 20 MAR 2025