ZILLA THREE DEPARTURE (OBSTACLE)

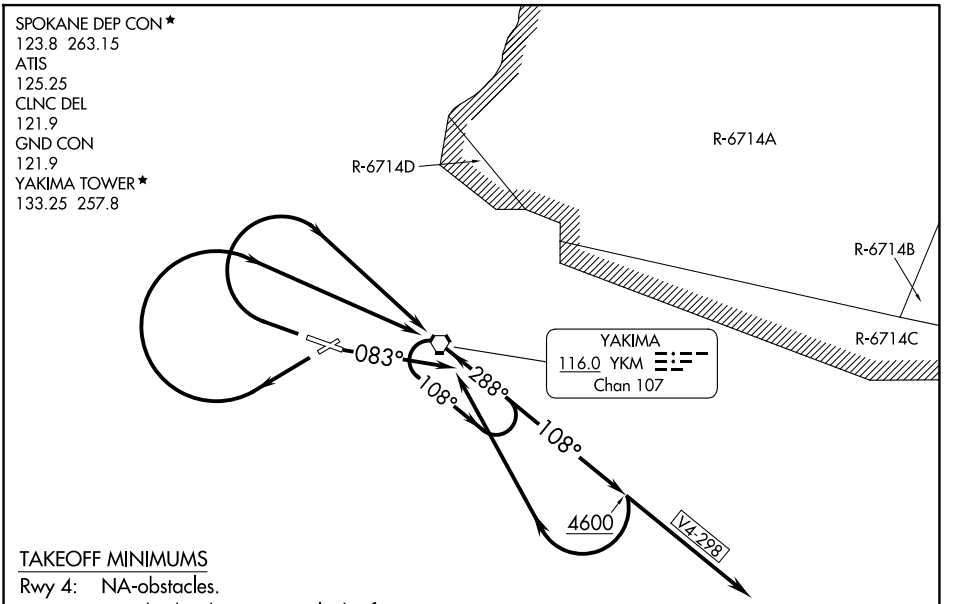

TAKEOFF MINIMUMS

Rwy 4: NA-obstacles.
Rwy 9: Standard with minimum climb of 250′ per NM to 2600.
Rwy 22: Standard with minimum climb of 325′ per NM to 3900.
Rwy 27: Standard with minimum climb of 330′ per NM to 2600.

TAKEOFF OBSTACLE NOTES

Rwy 9: OL on bldg 27′ from DER, 507′ right of centerline, 34′AGL/1074′MSL.
Pole 388′ from DER, 561′ right of centerline, 34′ AGL/1073′MSL.
Trees beginning 586′ from DER, 550′ right of centerline, up to 100′ AGL/1139′ MSL.
Rwy 22: Fence beginning 27′ from DER, 435′ right of centerline, up to 10′ AGL/1085′ MSL.
Trees beginning 570′ from DER, 228′ left of centerline, up to 100′ AGL/1199′ MSL.
Trees beginning 3195′ from DER, 202′ right of centerline, up to 100′ AGL/1199′ MSL.
Trees beginning 1 NM from DER, 732′ left of centerline, up to 100′ AGL/1239′ MSL.
Rwy 27: Antenna on bldg 398′ from DER, 282′ left of centerline, 15′ AGL/1117′ MSL.
Trees beginning 3824′ from DER, 1341′ right of centerline, up to 100′ AGL/1239′ MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 9: Climb heading 083° and outbound YKM R-108. Thence. . . .

TAKEOFF RUNWAYS 22, 27: Climbing right turn direct YKM VORTAC and outbound YKM R-108. Thence. . . .

. . . . eastbound aircraft V4-298 continue on course, all other departures continue climb on YKM R-108 until 4600, then climbing right turn direct YKM VORTAC and hold to cross YKM VORTAC at or above MEA/MCA for route of flight.

NW-1, 20 FEB 2025 to 20 MAR 2025
NW-1, 20 FEB 2025 to 20 MAR 2025