

ILS or LOC RWY 22

| | | | | |
|---------------------------|-------------------------|---|---------------|-------------------|
| LOC I-CVS 109.7 | APCH CRS 218° | Rwy Idg 10,003 TDZE 4295 Arprt Elev 4295 | AL-512 [USAF] | CANNON AFB (KCVS) |
|---------------------------|-------------------------|---|---------------|-------------------|


* When ALS inop, increase RVR to 40 and vis to 3/4 miles.
 ** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1 1/4 miles.

† MISSED APPROACH: Climb to 6000 out CVS TACAN R-220 to 6 DME (JEBES) then turn left climbing to 7000 intercept CVS R-193 to 12 DME (CLINK) and hold.


| | | | | |
|----------------------------|--|-------------------------------------|-------------------------------|----------------------------------|
| ATIS 119.1 269.9 | CANNON APP CON 118.425 352.1 | CANNON TOWER 120.4 270.25 | GND CON 121.9 275.8 | CLNC DEL 120.2 293.225 |
|----------------------------|--|-------------------------------------|-------------------------------|----------------------------------|

CAUTION: 1. ILS Rwy 22 Height Group 4 WCH 19 feet.

† Missed approach requires use of RNAV or ATC RADAR monitoring.

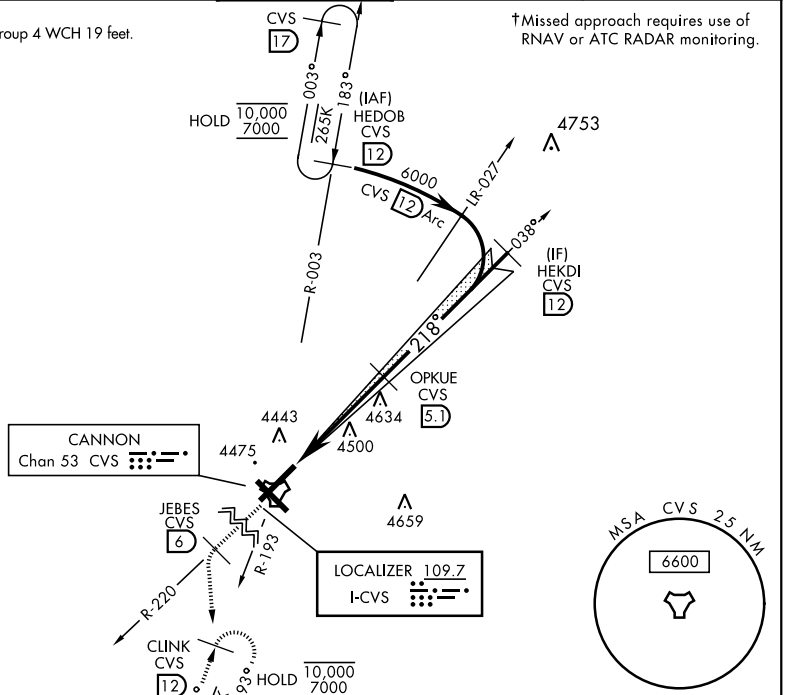

EMERG SAFE ALT 100 NM 8000

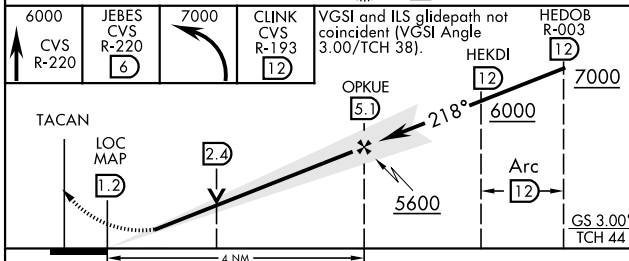

| | |
|-----------------|--------------------------|
| ELEV 4295 | TDZE 4295 |
| | |
| HIRL all rwys | |
| FAF to MAP 4 NM | |
| Knots | 60 90 120 150 180 |
| Min:Sec | 4:00 2:40 2:00 1:36 1:20 |

| | | | | | |
|------------|-----------------------|-----------------|-----------------------|-----------------|-----------------|
| CATEGORY | A | B | C | D | E |
| S-ILS 22* | 4495/24 | | 200 | (200-1/2) | |
| S-LOC 22** | 4720/24 425 (500-1/2) | | 4720/40 425 (500-3/4) | | |
| CIRCLING | 4840-1 545 (600-1) | 4860-1 1/2 | | 5000-2 1/4 | 5020-2 1/2 |
| | | 565 (600-1 1/2) | | 705 (800-2 1/4) | 725 (800-2 1/2) |

ILS or LOC RWY 22

SW-1, 20 FEB 2025 to 20 MAR 2025

SW-1, 20 FEB 2025 to 20 MAR 2025