RNAV (GPS) RWY 23
LAWRENCE MUNI (LWM)

WAAS	APP CRS	Rwy Idg	5001
CH 61022	233°	TDZE	144
W23A		Apt Elev	148

RNP APCH.

T A Circling Rwy 32 NA at night. Rwy 23 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct TEWKS and hold.

ATIS	BOSTON APP CON	LAWRENCE TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
126.75	124.4 279.6	119.25 (CTAF) L	124.3	124.3	126.15 (When twr closed)	122.8

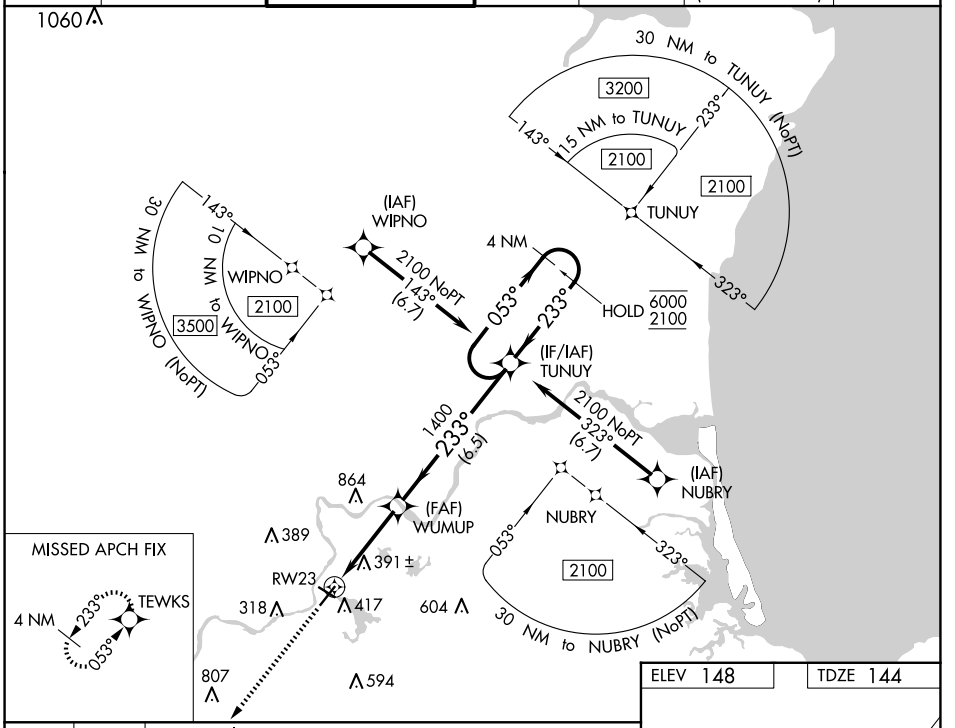

MISSED APCH FIX

ELEV 148 TDZE 144

2000 TEWKS VGSI and glidepath not coincident (VGSI Angle 3.70/TCH 55).

4 NM Holding Pattern

*LNAV only.

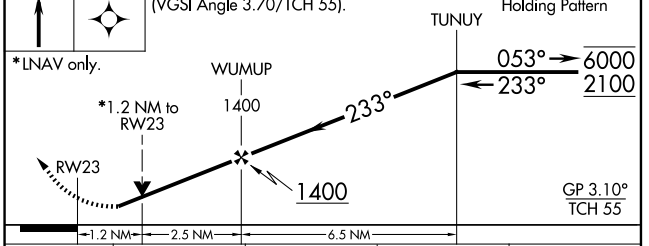



CATEGORY	A	B	C	D
LPV DA	562-1⅛ 418 (500-1⅛)			
LNAV/VNAV DA	717-1⅝ 573 (600-1⅝)			
LNAV MDA	660-1 516 (600-1)		660-1⅜ 516 (600-1⅜)	
C CIRCLING	740-1 592 (600-1)		840-2 692 (700-2)	1220-3 1072 (1100-3)

HIRL Rwy 5-23 L
MIRL Rwy 14-32 L
REIL Rwys 5, 14, 23, and 32 L

NE-1, 20 FEB 2025 to 20 MAR 2025