
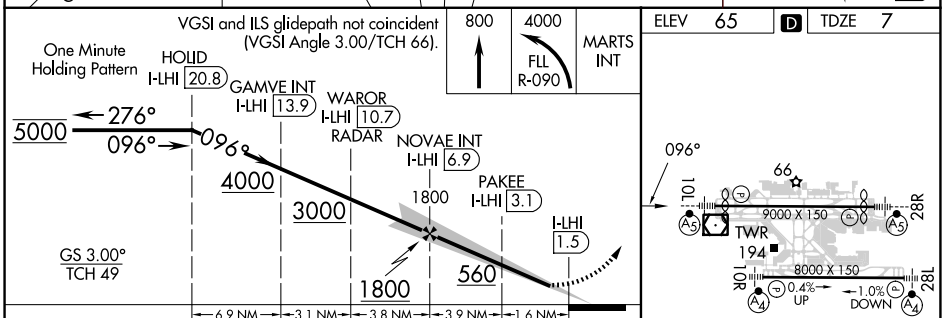


LOC/DME I-LHI 110.1 Chan 38	APP CRS 096°	Rwy Idg TDZE Apt Elev 8424 7 65
---	------------------------	---

ILS or LOC RWY 10L

FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

DME or RADAR required.		MALSRL	MISSED APPROACH: Climb to 800 then climbing left turn to 4000 on FLL VOR/DME R-090 to MARTS INT/FLL 9.2 DME and hold. Continue climb-in-hold to 4000.					
⚠ Simultaneous approach authorized. For inop ALS, increase S-LOC 10L Cats A, B visibility to RVR 5500. ⚠ PAKEE Fix Minimums: increase S-LOC 10L Cats A/B visibility to RVR 5500, Cats C/D to RVR 6000.			D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4	CPDLC

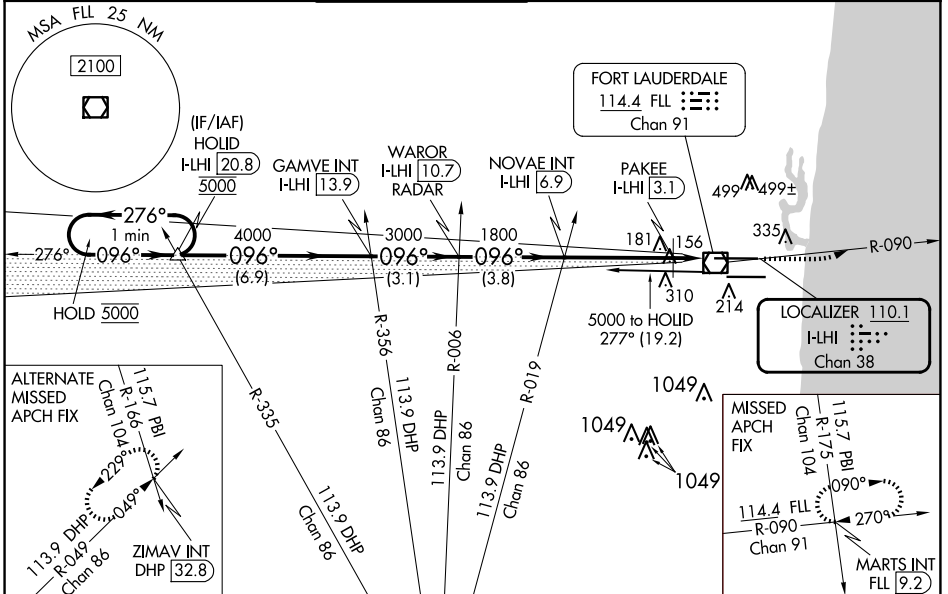

CATEGORY	A	B	C	D
S-ILS 10L	207/24 200 (200-½)			
S-LOC 10L	560/24	553 (500-½)	560/60	553 (500-1¼)
CIRCLING	680-1	615 (700-1)	735 (800-2)	735 (800-2¼)
PAKEE FIX MINIMUMS (DME REQUIRED)				
S-LOC 10L	420/24	413 (400-½)	420/40	413 (400-¾)
CIRCLING	680-1	615 (700-1)	735 (800-2)	735 (800-2¼)

ELEV 65	TDZE 7
HIRL Rwy 10L-28R and 10R-28L	
FAF to MAP 5.5 NM	
Knots	60 90 120 150 180
Min:Sec	5:30 3:40 2:45 2:12 1:50

SE-3, 20 FEB 2025 to 20 MAR 2025

SE-3, 20 FEB 2025 to 20 MAR 2025