

ILS Y RWY 4R

DANIEL K INOUEY INTL (HNL) (PHNL)

| | | |
|---|------------------------|--|
| LOC/DME I-HUM 110.5 Chan 42 | APP CRS 042° | Rwy Idg 8950 TDZE 8 Apt Elev 13 |
|---|------------------------|--|


DME required. From HUBAP: RNAV 1-GPS required. DME or RADAR required for procedure entry.





MISSED APPROACH: Climb to 540 then climbing right turn to 3000 on heading 220° and on HNL VORTAC R-171 to ALANA INT/HNL 13.9 DME and hold. *Missed approach requires minimum climb of 318 feet per NM to 1820. (If unable to meet climb gradient use S-ILS 4R minimums).

For inop ALS, increase S-ILS 4R all Cats visibility to 7/8 SM.

| | | | | |
|-------------------------------|------------------------------------|---|-------------------------------|--------------------------------|
| D-ATIS 127.9 251.15 | HCF APPROACH 118.3 269.0 | HONOLULU TOWER 118.1 257.8 123.9 273.575 (Rwy 8R/26L) | GND CON 121.9 348.6 | CLNC DEL 121.4 281.4 |
|-------------------------------|------------------------------------|---|-------------------------------|--------------------------------|

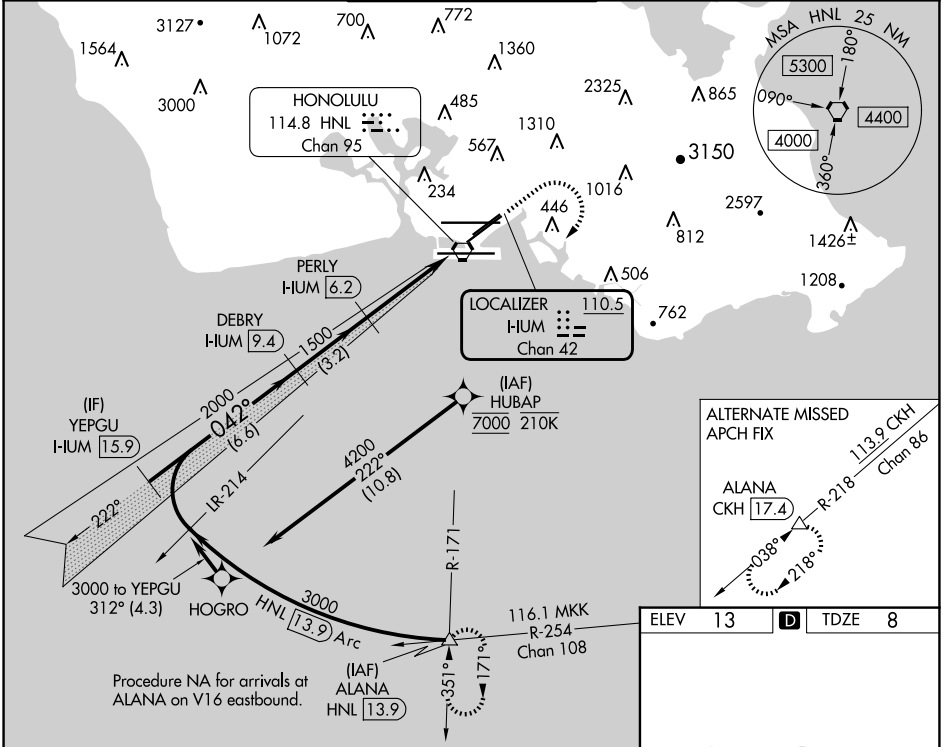

| | | |
|---------|---|--------|
| ELEV 13 | D | TDZE 8 |
|---------|---|--------|

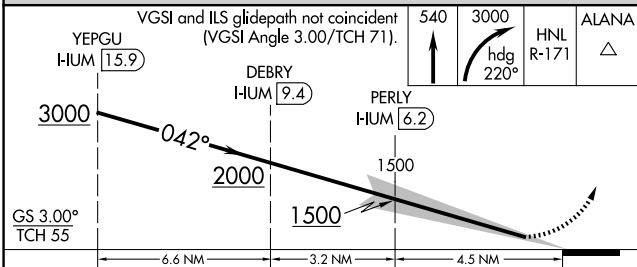

| CATEGORY | A | B | C | D |
|-----------|---|---------|---------------|---|
| S-ILS 4R* | | 258-1/2 | 250 (300-1/2) | |
| S-ILS 4R | | 308-1/2 | 299 (300-1/2) | |

MIRL Rwy 4L-22R

REIL Rws 4L, 8R, 22L, 22R, and 26R

HIRL Rws 4R-22L, 8L-26R, and 8R-26L

PAC, 20 FEB 2025 to 17 APR 2025

PAC, 20 FEB 2025 to 17 APR 2025