ILS or LOC RWY 17R

DENVER INTL (DEN)

LOC/DME I-ACX	APP CRS	Rwy Idg 12000
108.5	173°	TDZE 5392
Chan 22		Apt Elev 5434

DME or RADAR required for LOC only.
RNAV 1-GPS or RADAR required for procedure entry.

Simultaneous approach authorized. For inop ALS, increase S-17R LOC Cat C/D visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 10000 on heading 173° and on FQF VORTAC R-197 to HOHUM INT/ FQF 22.5 DME and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON	CLNC DEL	CPDLC
125.6 379.9 (ARR) 134.025 (DEP)	119.3 307.3 (N) 120.35 379.3 (S)	124.3 322.45	121.35 379.175 (W) 121.85 377.1 (E)	118.75	

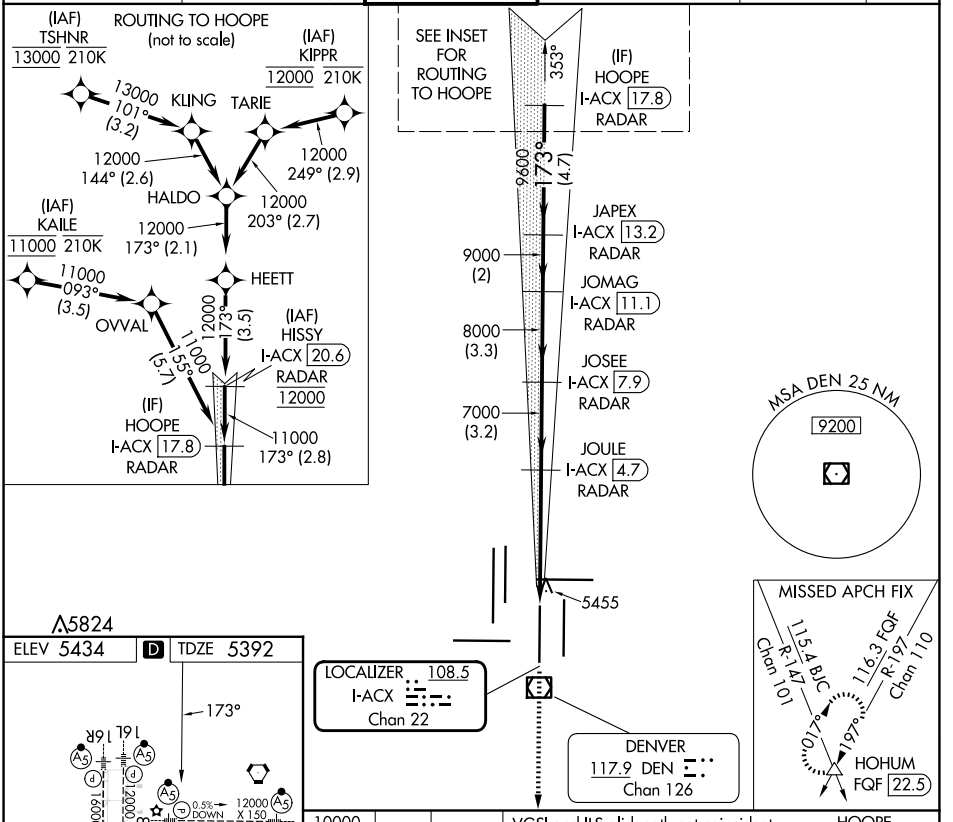

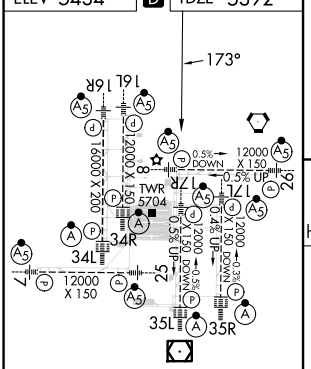

TDZ/CL Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R
HIRL all Rwys

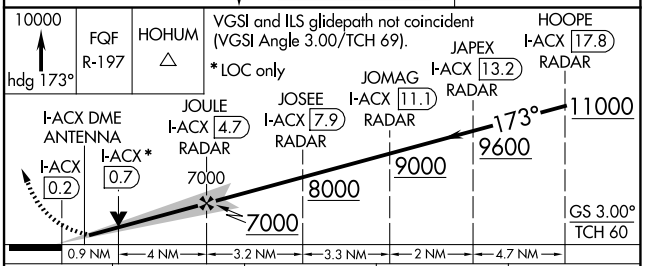

FAF to MAP 4.9 NM					
Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

CATEGORY	A	B	C	D
S-ILS 17R	5592/18 200 (200-½)			
S-LOC 17R	5720/24 328 (300-½)		5720/30 328 (300-⅝)	

SW-1, 20 FEB 2025 to 20 MAR 2025
SW-1, 20 FEB 2025 to 20 MAR 2025