

(THRPE3.THRPE) 17341



AL-739 (FAA)

# THRPE THREE DEPARTURE (RNAV)

WILEY POST (PWA)  
OKLAHOMA CITY, OKLAHOMA

ATIS  
128.725  
GND CON  
121.7  
WILEY POST TOWER \*  
126.9 306.9  
OKE CITY DEP CON  
124.6 266.8

**TOP ALTITUDE:  
ASSIGNED BY ATC**

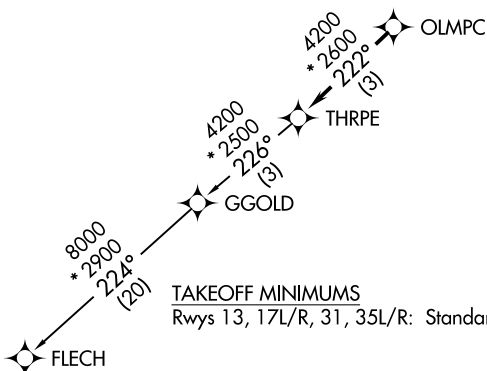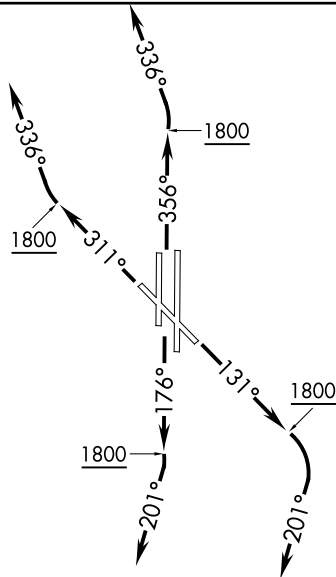

NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: RNAV 1.

### TAKEOFF MINIMUMS

Rwys 13, 17L/R, 31, 35L/R: Standard with minimum climb of 500' per NM to 2100.

NOTE: Chart not to scale.



### DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 13: Climb heading 131° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to OLMPC, thence . . .

TAKEOFF RWYS 17L/R: Climb heading 176° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to OLMPC, thence . . .

TAKEOFF RWY 31: Climb heading 311° to 1800, then right turn heading 336° or as assigned by ATC, expect RADAR vectors to OLMPC, thence . . .

TAKEOFF RWYS 35L/R: Climb heading 356° to 1800, then left turn heading 336° or as assigned by ATC, expect RADAR vectors to OLMPC, thence . . .

. . . . on track 222° to THRPE, then on (transition). Maintain 3000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

FLECH TRANSITION (THRPE3.FLECH)

GGOLD TRANSITION (THRPE3.GGOLD)

# THRPE THREE DEPARTURE (RNAV)

(THRPE3.THRPE) 07DEC17

OKLAHOMA CITY, OKLAHOMA  
WILEY POST (PWA)

SC-1, 20 MAR 2025 to 17 APR 2025

SC-1, 20 MAR 2025 to 17 APR 2025