




WAAS CH <b>81906</b> <b>W16A</b>	APP CRS <b>166°</b>	Rwy Idg TDZE Apt Elev	<b>5201</b> <b>3432</b> <b>3459</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) Z RWY 16

BEND MUNI (BDN)

RNP APCH - GPS.	MISSED APPROACH: Climb to 7400 direct JOGON and on track 087° to MIKKO and on track 038° to REMTE and hold, continue climb-in-hold to 7400.
<p>Baro-VNAV and VDP NA when using Redmond altimeter setting. Rwy 16 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Redmond altimeter setting: increase LPV DA to 3763 feet and all visibilities 1/4 SM; increase LNAV/VNAV DA to 3821 feet and all visibilities 1/4 SM; increase all MDAs 100 feet and LNAV visibility Cats C and D 1/4 SM, and Circling visibility Cat C 1/2 SM.</p>	

AWOS-3 <b>134.425</b>	SEATTLE CENTER <b>126.15 269.475</b>	UNICOM <b>123.0 (CTAF)</b>
--------------------------	---	-------------------------------

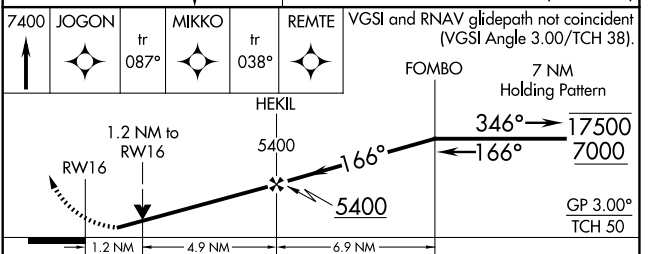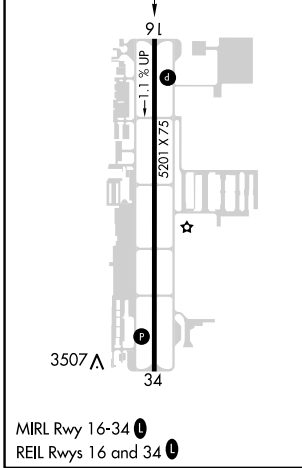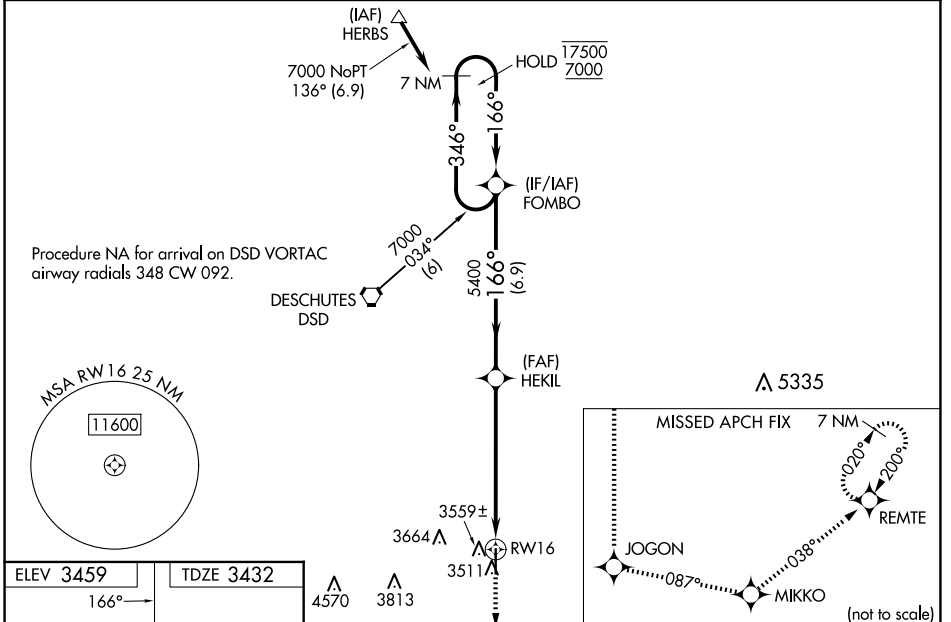

CATEGORY	A	B	C	D
LPV DA		3682-3/4	250 (300-3/4)	
LNAV/VNAV DA		3740-7/8	308 (300-7/8)	
LNAV MDA	3820-1	388 (400-1)	3820-1 1/8	388 (400-1 1/8)
CIRCLING	3960-1 501 (600-1)	3980-1 521 (600-1)	4120-1 3/4 661 (700-1 3/4)	4640-3 1181 (1200-3)

NW-1, 20 MAR 2025 to 17 APR 2025

NW-1, 20 MAR 2025 to 17 APR 2025