


WAAS CH 86528 W18A	APP CRS 179°	Rwy Idg 9000 TDZE 741 Apt Elev 749
--	------------------------	---

RNAV (GPS) RWY 18L

NORTH TEXAS RGNL/PERRIN FLD (GYI)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 3000 direct SERYO and hold.
Circling Rwy 18R, 36L NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM.			

ATIS 118.775	FORT WORTH CENTER 124.75 323.0	NORTH TEXAS TOWER ★ 120.575 (CTAF) 233.7	GND CON 124.125
------------------------	--	---	---------------------------

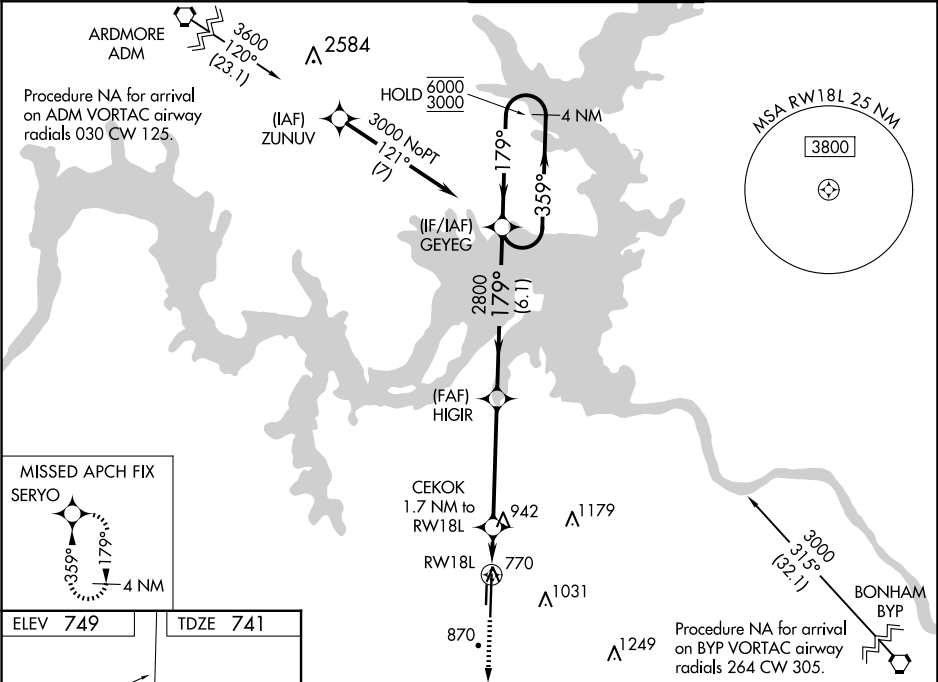

		VGSi and RNAV glidepath not coincident (VGSi angle 3.00°/TCH 48).		4 NM Holding Pattern	
3000 SERYO		HIGIR 2800		359° 6000	
CEKOK 1.7 NM to RW18L		179°		179° 3000	
RW18L		1320		2800	
GP 3.00° TCH 55		1.7 NM		4.6 NM	
		6.1 NM			
CATEGORY	A	B	C	D	
LPV DA	941-½		200 (200-½)		
LNAV/VNAV DA	1015-½		274 (300-½)		
LNAV MDA	1200-½	459 (500-½)	1200-⅞	459 (500-⅞)	
CIRCLING	1300-1	551 (600-1)	1400-1¾ 651 (700-1¾)	1540-2½ 791 (800-2½)	