

VOR/DME HRL 113.65 Chan 83 (Y)	APP CRS 325°	Rwy Idg TDZE Apt Elev	7257 36 36
--	------------------------	-----------------------------	---------------------------------------

VOR Z RWY 31
VALLEY INTL (HRL)

DME required.


T VDP NA when using Port Isabel altimeter setting. When local altimeter setting not received, use Port Isabel altimeter setting and increase all MDAs 60 feet and S-31 visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. For inop ALS, increase S-31 Cats C/D visibilities to 1½ SM.

MALSFR



MISSED APPROACH: Climb to 1000 then climbing right turn to 2100 direct HRL VOR/DME and hold, continue climb and hold to 2100.

ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3 (CTAF) 0 317.6	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	--	-------------------------	-------------------------

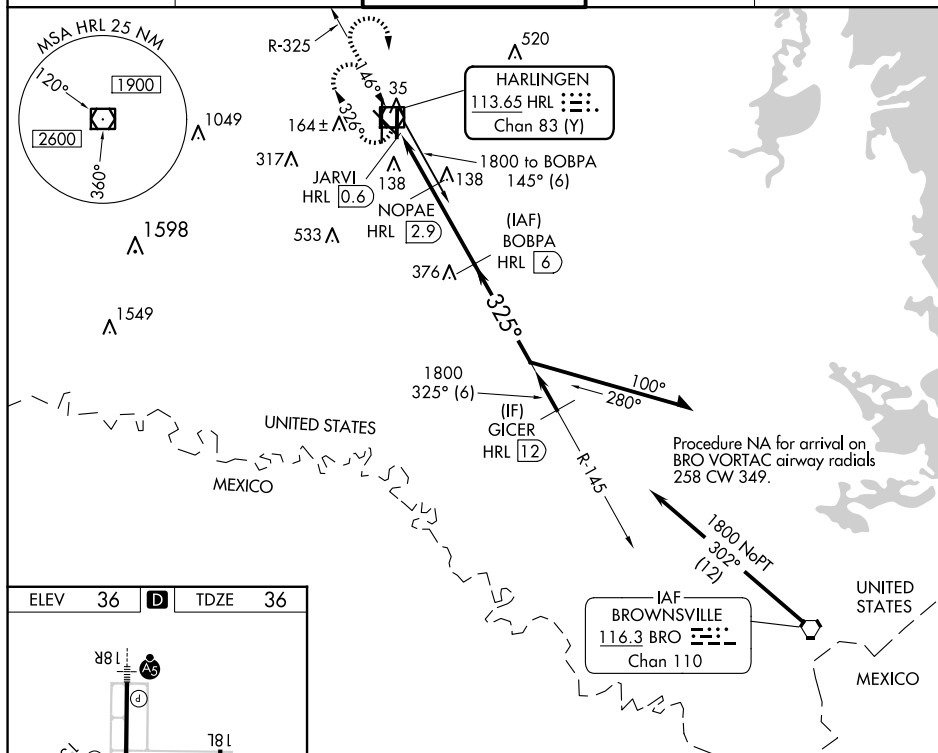

MIRA Rwy 18L-36R
 REIL Rwys 13 and 18L
 HIRL Rwys 13-31 and 18R-36L

1000 ↑	2100 ↗	HRL 				
CATEGORY	A		B		C	D
S-31	420-1 $\frac{1}{2}$ 384 (400- $\frac{1}{2}$)		420- $\frac{3}{4}$ 384 (400- $\frac{3}{4}$)			
C CIRCLING	460-1 424 (500-1)	560-1 524 (600-1)	600-1 $\frac{1}{2}$ 564 (600-1 $\frac{1}{2}$)		680-2 644 (700-2)	