

WAAS CH 78123 W26A	APP CRS 257°	Rwy Idg 6118 TDZE 384 Apt Elev 403
--	------------------------	---


RNAV (GPS) RWY 26
LANCASTER (LNS)

T **A** Night landing: Rwy 13, 31 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Harrisburg LNAV altimeter setting and increase all DA 64 feet, all MDA 80 feet, increase LPV and LNAV/VNAV visibility all Cats and LNAV and Circling Cat C and D visibility ¼ mile. Baro-VNAV and VDP NA when using Harrisburg LNAV altimeter setting.


MISSED APPROACH:
Climb to 3000 direct
FANRU and on track 331°
to BAARN and hold.

ATIS 125.675	HARRISBURG APP CON 126.45 281.525	LANCASTER TOWER ★ 120.9 (CTAF) 0 251.1	GND CON 121.8	UNICOM 122.95
-----------------	--------------------------------------	---	------------------	------------------

RADAR REQUIRED

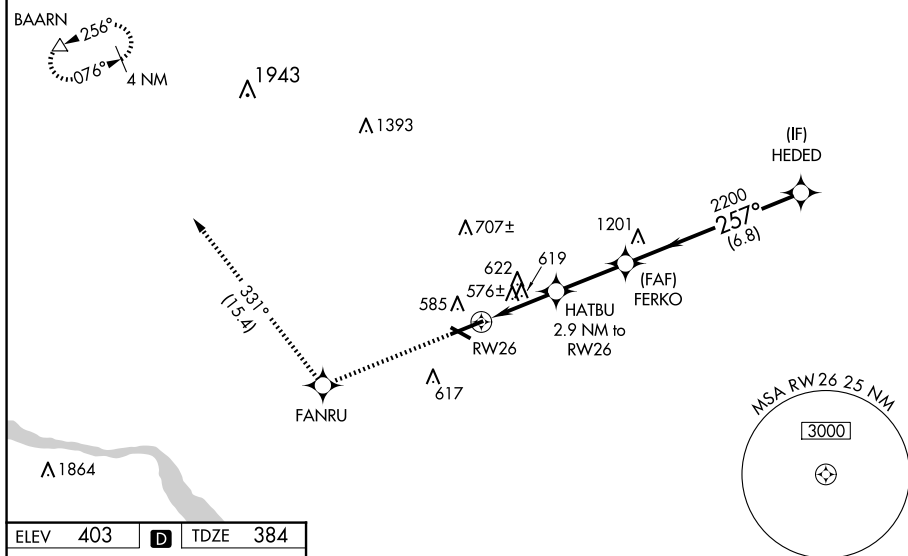

ELEV	403	D	TDZE	384
------	-----	----------	------	-----

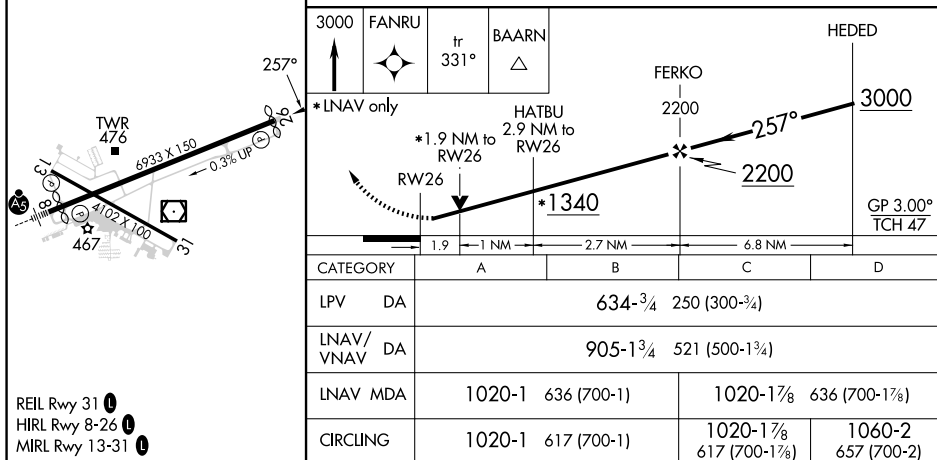

RNAV (GPS) RWY 26