


WAAS CH 49106 W33A	APP CRS 326°	Rwy Idg 10179 TDZE 93 Apt Elev 100
--	------------------------	---

RNAV (GPS) RWY 33
COLD BAY (CDB) (PACD)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Circling NA for Cat A southwest of Rwy 15-33 at night. Circling NA for Cat B/C/D southwest of Rwy 15-33. ▲	MISSED APPROACH: Climb to 3000 direct DEADS and hold.
---	---

ASOS 135.75	ANCHORAGE CENTER 118.5 278.3	COLD BAY RADIO 123.6 (CTAF) 0
-----------------------	--	---

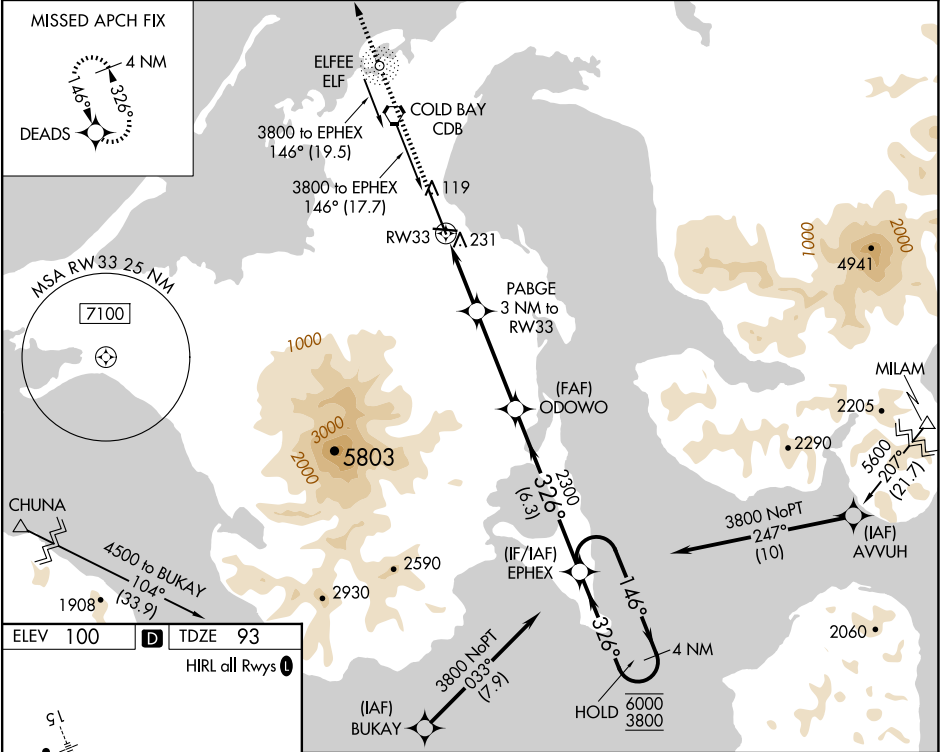

ELEV 100	D	TDZE 93
HIRL all Rwy's 0		
3000 DEADS VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 36).		
*LNAV only		
PABGE 3 NM to RW33		
RW33 1.2 NM to RW33		
ODOWO 2300		
EPHEX 4 NM Holding Pattern		
146° 326° 6000 3800		
GP 3.00° TCH 55		
1.2 NM 1.8 NM 3.8 NM 6.3 NM		
CATEGORY	A	B C D
LPV DA	293-¾	200 (200-¾)
LNAV/VNAV DA	392-⅞	299 (300-⅞)
LNAV MDA	500-1 407 (400-1)	500-1½ 407 (400-1½)
CIRCLING	540-1 440 (500-1)	560-1 460 (500-1) 560-1½ 460 (500-1½) 860-2½ 760 (800-2½)