


|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>86614</b><br><b>W34A</b> | APP CRS<br><b>345°</b> | Rwy Idg <b>4798</b><br>TDZE <b>3081</b><br>Apt Elev <b>3086</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 34

RONAN (7SØ)

|           |                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RNP APCH. | MISSED APPROACH: Climb to 13000 direct PEKBE and on track 255° to QATQI and on track 209° to HANIM and hold, continue climb-in-hold to 13000.                                                                                                                                                                                                                                    |
| NA        | Baro-VNAV NA when using Missoula altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C. Circling NA east of Rwy 16-34. When local altimeter setting not received, use Missoula altimeter setting and increase LPV DA to 3545 and all visibilities ¾ SM, LNAV/VNAV DA to 3545 and all visibilities ¾ SM; and increase all MDAs 120 feet. |

|                          |                                                 |                                |
|--------------------------|-------------------------------------------------|--------------------------------|
| AWOS-3<br><b>119.925</b> | SALT LAKE CITY CENTER<br><b>127.075 244.875</b> | AUNICOM<br><b>122.8 (CTAF)</b> |
|--------------------------|-------------------------------------------------|--------------------------------|

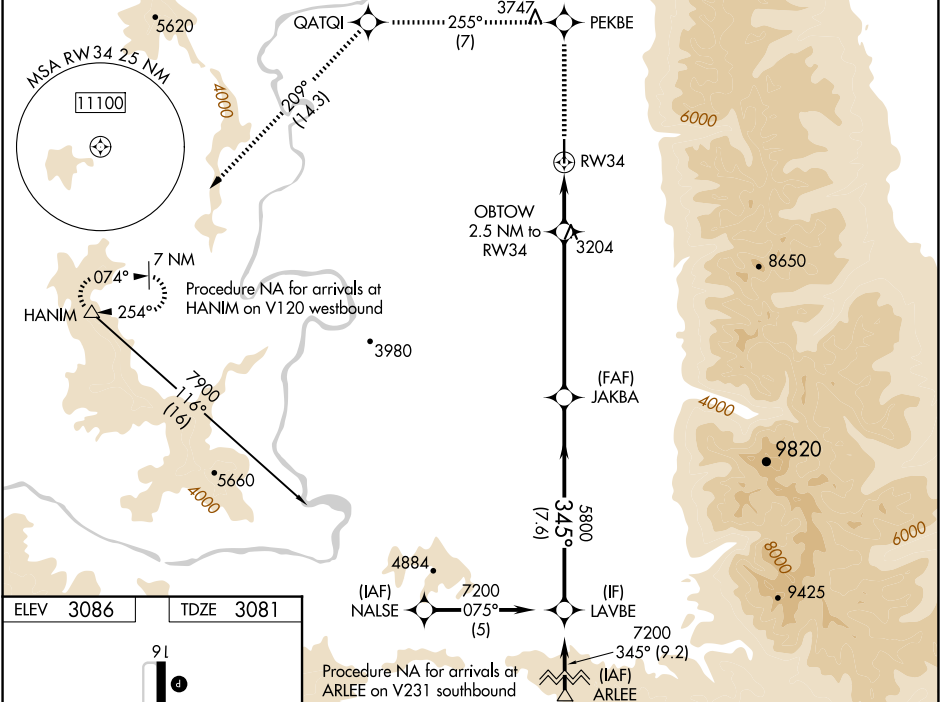

|                   |           |
|-------------------|-----------|
| ELEV 3086         | TDZE 3081 |
|                   |           |
| MIRL Rwy 16-34    |           |
| RONAN, MONTANA    |           |
| Amdt 1B 25FEB21   |           |
| 47°34'N-114°06'W  |           |
| RONAN (7SØ)       |           |
| RNAV (GPS) RWY 34 |           |