

CHSLY SIX ARRIVAL (RNAV) Transition Routes

CHARLOTTE APP CON
126.15 282.325
D-ATIS ARR
121.15

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

10 NM
043°
223°
AIROW

USE CAUTION: Parachute jumping 3 NM south SLPOH, 5 NM radius KRQU, AOB 14,500 MSL (SR-SS).

10 NM
041°
221°
BEMOH

10 NM
041°
221°
WRLD

AIROW TRANSITION (AIROW.CHSLY6)
COUPN TRANSITION (COUPN.CHSLY6)
NUUMN TRANSITION (NUUMN.CHSLY6)
SDAIL TRANSITION (SDAIL.CHSLY6)

BURRZ
FL270 280K
FL240

10 NM
041°
221°
BLUEJ
FL270

NOTE: Jet aircraft only.
NOTE: Landing south use Rwy 18L transition, landing north use Rwy 36R transition. Expect runway assignment from CLT approach.
NOTE: Jet aircraft descend via Mach number until 280K, if unable, advise ATC.
NOTE: Do not file NUUMN Transition - to be assigned by ATC.

SKLES
FL220 280K

DENTT
16000 270K

BOOTS
FL230 13000

10 NM
041°
221°
WLLSH
16000 270K

CHSLY
FL220 250K
13000

NUUMN
10 NM
091°
272°
FEDOX

10 NM
087°
267°
PELTS


COUPN
16000 3100
247°
ARGAL

SDAIL
FL230 280K
17000

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

CHSLY SIX ARRIVAL (RNAV) Transition Routes

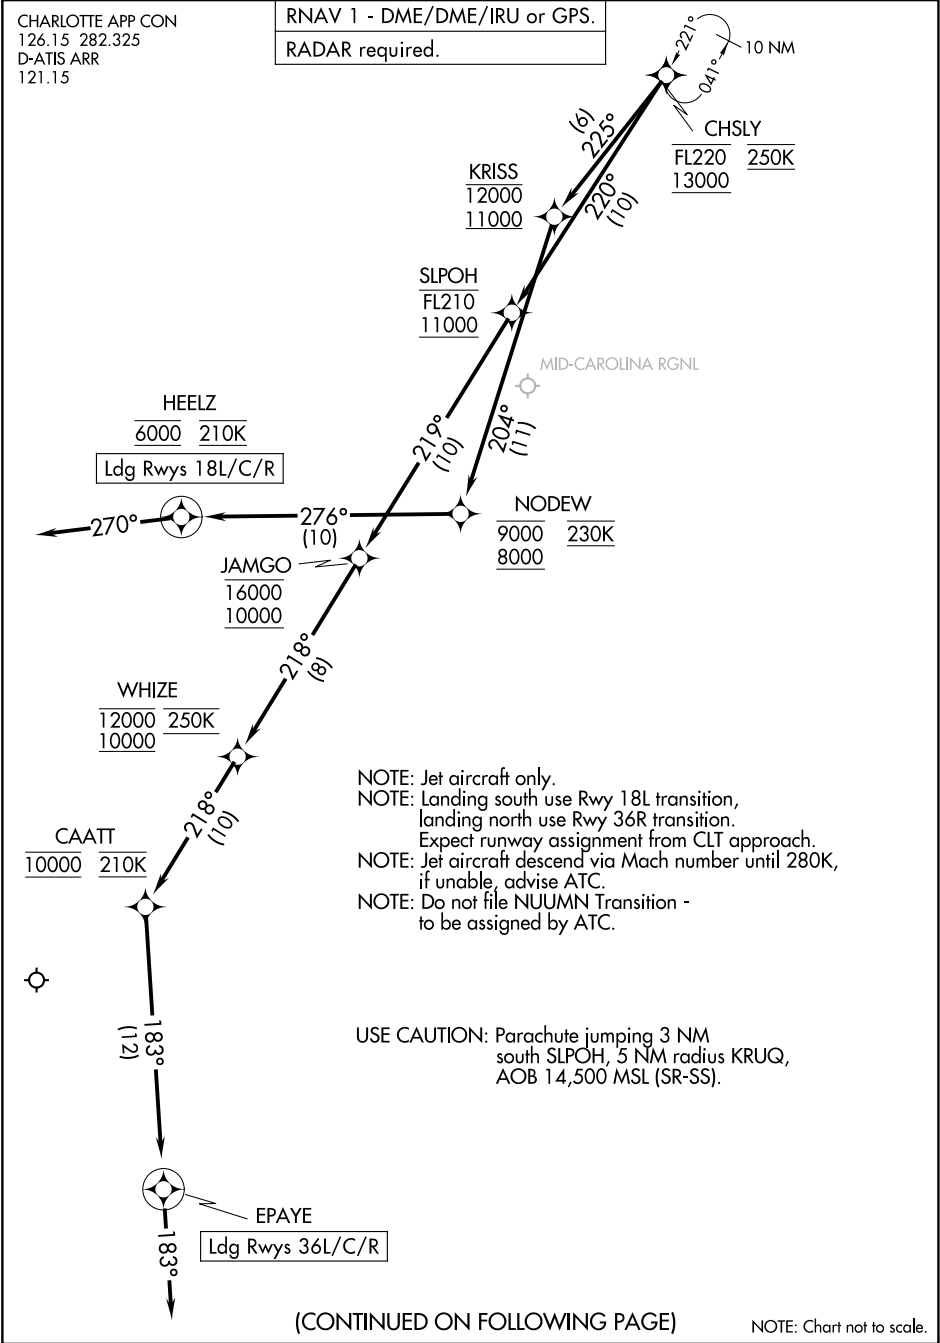

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025

ARRIVAL ROUTE DESCRIPTION

LANDING RUNWAYS 18L/C/R: From CHSLY on track 225° to cross KRISS between 11000 and 12000, then on track 204° to cross NODEW between 8000 and 9000 and at 230K, then on track 276° to cross HEELZ at 6000 and at 210K, then on track 270°. Expect RADAR vectors to final approach course.

LANDING RUNWAYS 36L/C/R: From CHSLY on track 220° to cross SLPOH between 11000 and FL210, then on track 219° to cross JAMGO between 10000 and 16000, then on track 218° to cross WHIZE between 10000 and 12000 and at 250K, then on track 218° to cross CAATT at 10000 and at 210K, then on track 183° to EPAYE, then on track 183°. Expect RADAR vectors to final approach course.

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025