

LOC I-DAY 108.3	APP CRS 185°	Rwy Ldg TDZE 996 Apt Elev 1009	ILS or LOC RWY 18 JAMES M COX DAYTON INTL (DAY)
---------------------------	------------------------	--	--


▼

For inop ALS, increase S-LOC 18 Cat C/D visibility to RVR 6000.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1400 then climbing right turn to 3100 direct DQN VOR/DME and hold.

ATIS 125.8	COLUMBUS APP CON 134.45 323.15	DAYTON TOWER 119.9 257.7	GND CON 121.9
----------------------	--	------------------------------------	-------------------------

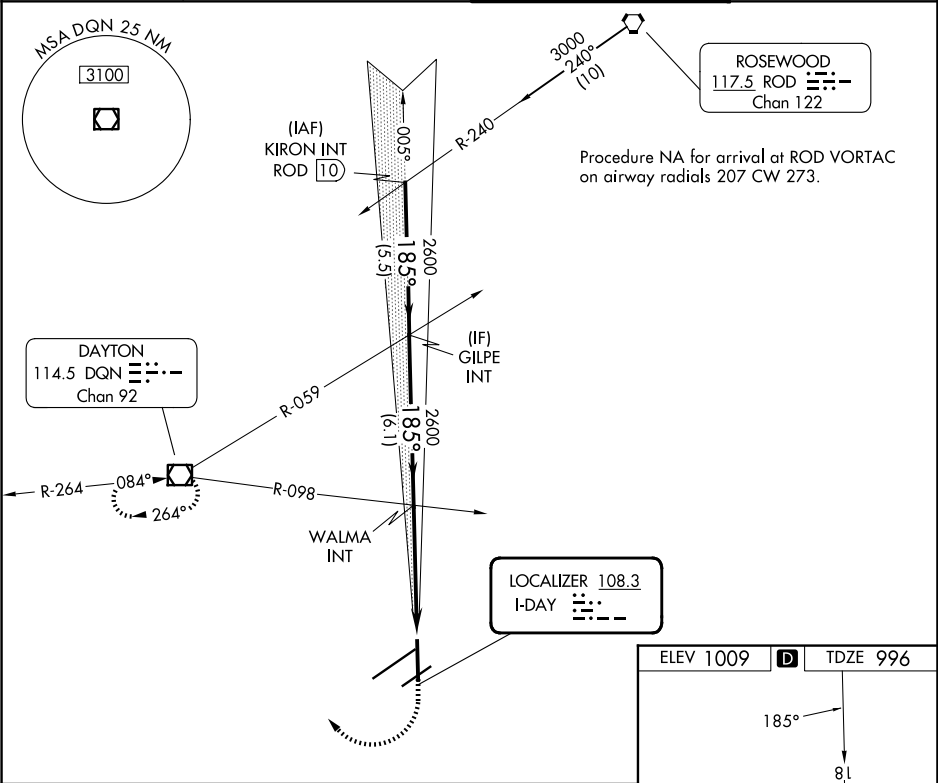

KIRON INT ROD 10				1400 3100 DQN			
GS 3.00° TCH 55				3000 185° 2600 2600			
5.5 NM				6.1 NM			
4.9 NM							
CATEGORY	A	B	C	D			
S-ILS 18 **	1196/24			200 (200-½)			
S-LOC 18	1400/24	404 (400-½)	1400/40	404 (400-¾)			
CIRCLING	1580-1	571 (600-1)	1580-1½ 571 (600-1½)	1640-2 631 (700-2)			

ELEV 1009 TDZE 996

185°

8.1

7.25 X 150

10901 X 150

3502 X 150

TWR

36

36

HIRL all Rwys

TDZL/RCLS Rwy 6L

REIL Rwys 6R and 36

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Seq	4:54	3:16	2:27	1:58	1:38

EC-2, 27 NOV 2025 to 25 DEC 2025

EC-2, 27 NOV 2025 to 25 DEC 2025