

LOC/DME I-MED
111.1
Chan **48**

APP CRS
093°

Rwy Ldg
TDZE **672**
Apt Elev **680**

ILS or LOC RWY 10L
CHICAGO O'HARE INTL (ORD)

From GIBNS: RNAV-1 GPS required.


RNAV 1-GPS or RADAR required for procedure entry. DME or RADAR required.

Simultaneous approach authorized.

ALSIF-2

MISSED APPROACH: Climb to 4000 on heading 093° and CGT VORTAC R-336 to CGT VORTAC and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 132.7 348.0	124.125 GND CON 118.05 (TWR NORTH) 226.675 (TWR SOUTH) (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
--	--	------------------------------------	---	---	--------------------------	-------

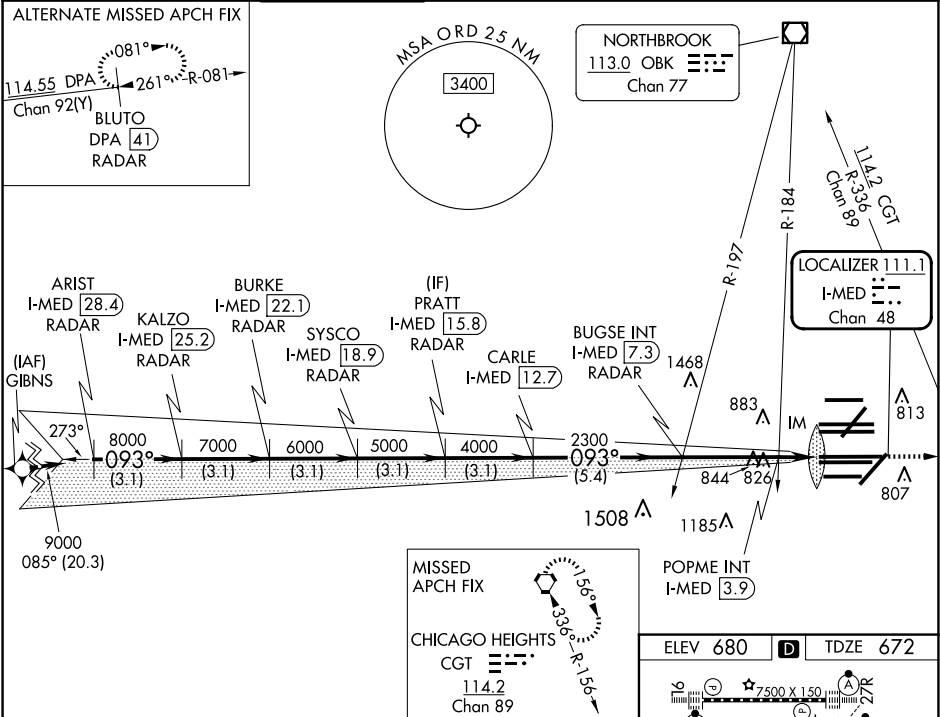

ARIST I-MED [28.4] RADAR	KALZO I-MED [25.2] RADAR	BURKE I-MED [22.1] RADAR	SYSCO I-MED [18.9] RADAR	PRATT I-MED [15.8] RADAR	CARLE I-MED [12.7] RADAR	BUGSE INT I-MED [7.3] RADAR	POPME INT I-MED [3.9] RADAR	IM
9000	8000	7000	6000	5000	4000	2300	2300	2300
3.1 NM	3.1 NM	3.1 NM	3.1 NM	3.1 NM	5.4 NM	3.4 NM	1.4 NM	0.1 NM
CATEGORY A B C D								
S-ILS 10L 872/18 200 (200-½)								
S-LOC 10L 1200/24 528 (600-½) 1200/55 528 (600-1)								
POPME FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)								
S-LOC 10L 1080/24 408 (400-½) 1080/40 408 (400-¾)								
Knots 60 90 120 150 180								
Min:Sec 4:54 3:16 2:27 1:58 1:38								