

WAAS
CH **90221**
W21A

APP CRS
212°

Rwy Ldg
TDZE **3669**
Apt Elev **3680**

RNAV (GPS) Y RWY 21
GREAT FALLS INTL (GTF')


RNP APCH - GPS.

▼
▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 49°C.

MISSED APPROACH: Climb to 8000 direct DCEEE and on track 263° to TUCKB and hold, continue climb-in-hold to 8000.

ATIS 126.6 269.0	GREAT FALLS APP CON 128.6 379.175	GREAT FALLS TOWER 118.7 282.2	GND CON 121.7 348.6
----------------------------	---	---	-------------------------------

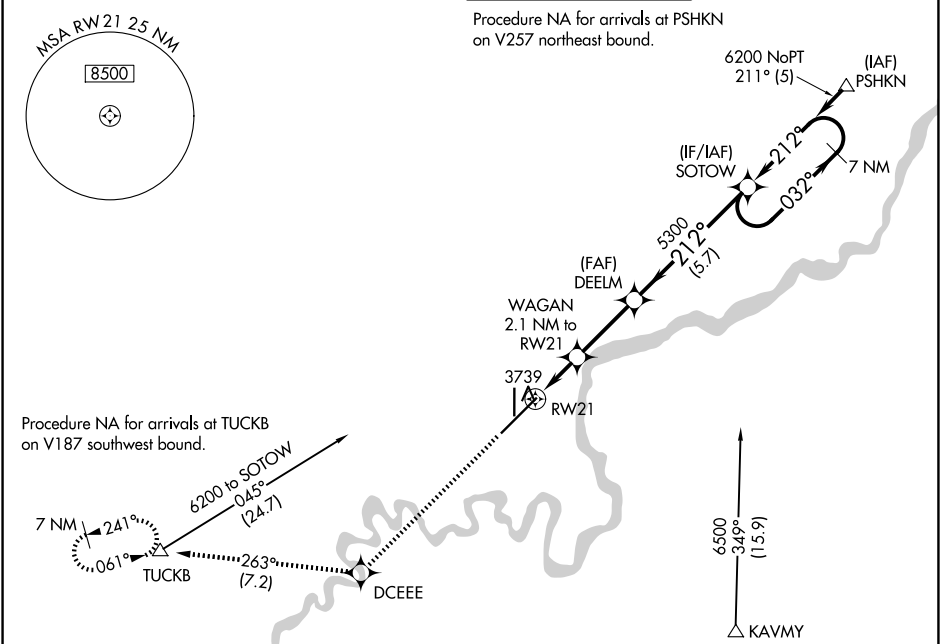

ELEV 3680

D

TDZE 3669

8000

DCEEE

tr 263°

TUCKB

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 75).

SOTOW

7 NM Holding Pattern

*LNAV only.

WAGAN 2.1 NM to RW21

DEELM

5300

212°

032°

6200

GP 3.00° TCH 59

0.8 1.3 NM 2.9 NM 5.7 NM

CATEGORY	A	B	C	D
LPV DA	3869/40		200 (200-¾)	
LNAV/VNAV DA	3927/45		258 (300-¾)	
LNAV MDA	4000/55 331 (400-1)		4000/50 331 (400-1)	
CIRCLING	4140-1 460 (500-1)		4340-1¾ 660 (700-1¾) 4420-2¼ 740 (800-2¼)	

HIRL Rwy 3-21

MIRL Rwy 17-35

REIL Rwy 21

TDZ/CL Rwy 3