

TRUPR THREE DEPARTURE (RNAV)

OKC WILL ROGERS INTL (OKC)
OKLAHOMA CITY, OKLAHOMA

D-ATIS
125.85
CLNC DEL
124.35
GND CON
121.9 348.6
ROGERS TOWER
119.35 269.45
OKE CITY DEP CON
124.2 336.4


TOP ALTITUDE:
ASSIGNED BY ATC

GTyer 8000
*2500
043°
(15)
DRLer 8000
*2600
056°
(61)

(5)
4200
*2500
056°
COORT

MOOON 4200
*2500
056°
(4)
TRUPR

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

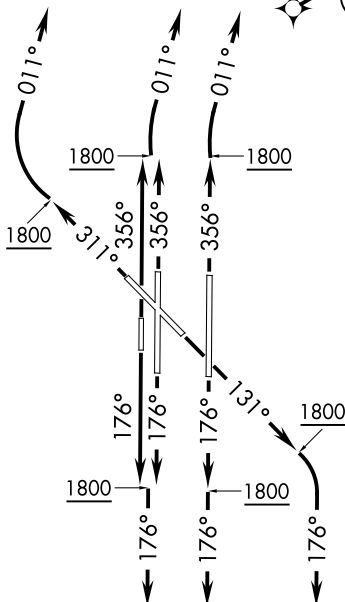

TAKEOFF MINIMUMS
Rwys 13, 17L/R, 18, 31, 35L/R, 36:
Standard with minimum climb of 500' per NM to 1800.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION
TAKEOFF RWY 13: Climb heading 131° to 1800, then right turn heading 176° or as assigned by ATC, expect RADAR vectors to MOOON, thence . . .
TAKEOFF RWYS 17L/R, 18: Climb heading 176° to 1800, then heading 176° or as assigned by ATC, expect RADAR vectors to MOOON, thence . . .
TAKEOFF RWY 31: Climb heading 311° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to MOOON, thence . . .
TAKEOFF RWYS 35L/R, 36: Climb heading 356° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to MOOON, thence . . .
. . . on track 056° to TRUPR, then on (transition). Maintain 5000 or as assigned by ATC.
Expect filed altitude 10 minutes after departure.
COORT TRANSITION (TRUPR3.COORT)
DRLER TRANSITION (TRUPR3.DRLER)
GTyer TRANSITION (TRUPR3.GTyER)