



LOC/DME I-PHX	APP CRS	Rwy Ldg
111.5	078°	10300
Chan 52		TDZE 1116
		Apt Elev 1135

ILS or LOC/DME RWY 7L
PHOENIX SKY HARBOR INTL (PHX)

▼ ▲	For inoperative ALS, increase S-LOC 7L Cats C/D visibility to RVR 5500.	MALSR 	MISSED APPROACH: Climb to 5000 then left turn direct PXR VORTAC and hold.
D-ATIS 127.575	PHOENIX APP CON 128.65 353.9	PHOENIX TOWER 118.7 278.8 (8-26) 120.9 254.3 (7L-25R, 7R-25L)	GND CON 119.75 269.2 (N) 132.55 269.2 (S)

DME REQUIRED

Procedure NA for arrivals at AVONA on V16 westbound.

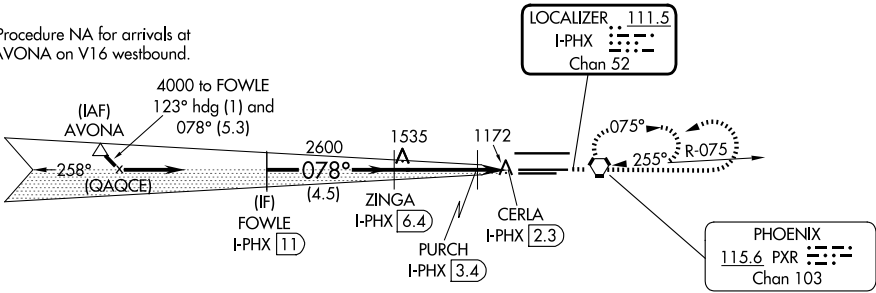

ALTERNATE MISSED APCH FIX

WILLIE
IWA
113.3
Chan 80

ELEV 1135 **D** TDZE 1116

	FOWLE I-PHX 11	ZINGA I-PHX 6.4	PURCH I-PHX 3.4	CERLA I-PHX 2.3	
	4000	2600	2600	1620	
	078°				
GS 3.00° TCH 57					
	4.5 NM	3 NM	1.1	0.4	
CATEGORY	A	B	C	D	
S-ILS 7L	1326/24 210 (200-½)				
S-LOC 7L	1460/24	344 (400-½)	1460/30	344 (400-⅝)	
CIRCLING	1740-1	605 (700-1)	2040-2¾ 905 (1000-2¾)	2560-3 1425 (1500-3)	

