


TACAN FOE Chan 53 (111.6)	APP CRS 304°	Rwy Ldg TDZE 1037 Apt Elev 1078
---	------------------------	---

TACAN RWY 31
TOPEKA RGNL (F'OE)


NA For inoperative ALS, increase S-31 Cats C/D/E visibility to 1 3/8 SM.	MALSR 	MISSED APPROACH: Climbing left turn to 3000 heading 190° and on FOE TACAN R-213 to STANC/19 DME and hold.
---	--	---

ATIS 128.25	KANSAS CITY CENTER 123.8 343.7	FORBES TOWER★ 120.8 (CTAF) 340.2	GND CON 118.425 275.8	UNICOM 122.95
-----------------------	--	--	---------------------------------	-------------------------


NOT FOR CIVIL USE

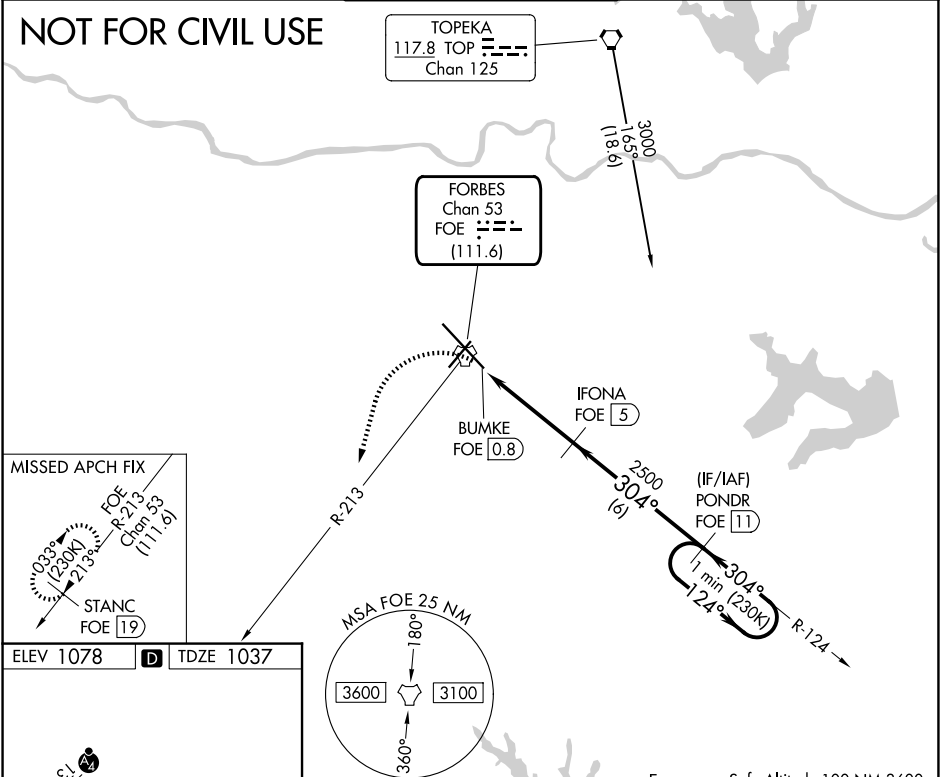

ELEV 1078	D	TDZE 1037
-----------	----------	-----------

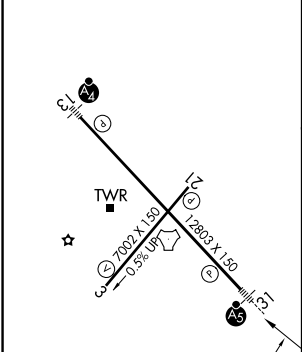

REIL Rws 3, 13 and 21
MIRL Rwy 3-21
HIRL Rwy 13-31

Emergency Safe Altitude 100 NM 3600						
 3000 hdg 190°		FOE R-213	STANC FOE 19			
 3000 124° ← 304°		FOE TACAN	FOE BUMKE FOE 0.8	IFONA FOE 5	PONDR FOE 11	
 2500 3.15° TCH 58		FOE 2.1		One Minute Holding Pattern		
1.3		2.9 NM		6 NM		
CATEGORY	A		B	C	D	E
S-31	1500/24		463 (500-½)	1500/50		463 (500-1)
CIRCLING	1520-1 442 (500-1)		1580-1 502 (600-1)	1580-1½ 502 (600-1½)	1700-2 622 (700-2)	1720-2¼ 642 (700-2¼)