


WAAS CH 61311 W04A	APP CRS 043°	Rwy Ldg TDZE 24 Apt Elev 24	4974
--	------------------------	---	-------------

RNAV (GPS) RWY 4
VERO BEACH RGNL (VRB)

⚠ Circling to Rwy 30R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Pierce altimeter setting and increase LPV DA to 320 feet; increase LNAV/VNAV DA to 378 feet and all visibilities $\frac{1}{8}$ SM; increase all MDAs 40 feet and LNAV Cat C/D and Circling Cat C/D visibility $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using Fort Pierce altimeter setting. Rwy 4 helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 2000 direct
OJEMY and hold.

ATIS 120.575	PALM BEACH APP CON 123.625 225.4 (N)	VERO BEACH TOWER ★ 126.3 (CTAF) 0	GND CON 127.45	UNICOM 122.95
------------------------	--	---	--------------------------	-------------------------

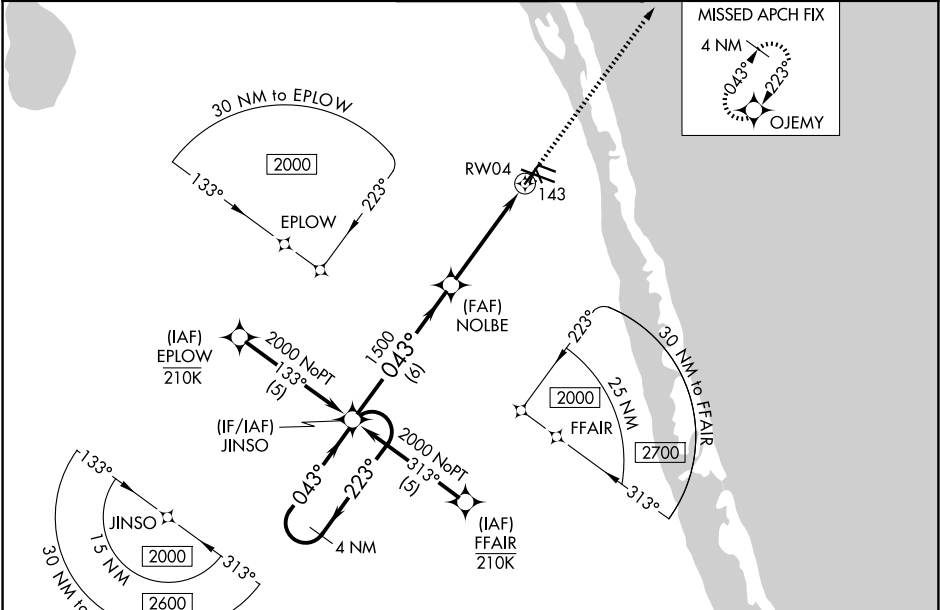

ELEV 24 D TDZE 24	
CATEGORY	A B C D
LPV DA	297- $\frac{7}{8}$ 273 (300- $\frac{7}{8}$)
LNAV/VNAV DA	355-1 $\frac{1}{8}$ 331 (400-1 $\frac{1}{8}$)
LNAV MDA	480-1 456 (500-1) 480-1 $\frac{3}{8}$ 456 (500-1 $\frac{3}{8}$)
CIRCLING	560-1 536 (600-1) 660-1 $\frac{3}{4}$ 636 (700-1 $\frac{3}{4}$) 820-2 $\frac{1}{2}$ 796 (800-2 $\frac{1}{2}$)

SE-3, 27 NOV 2025 to 25 DEC 2025

SE-3, 27 NOV 2025 to 25 DEC 2025