


WAAS CH 70328 W06A	APP CRS 058°	Rwy Ldg TDZE Apt Elev	9509 173 173
--	------------------------	-----------------------------	---


RNAV (GPS) Y RWY 6

BRADLEY INTL (BDL)

RNP APCH - GPS.		ALSIF-2	MISSED APPROACH: Climb to 3000 direct KIBBE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.			
D-ATIS 118.15	BRADLEY APP CON 123.95 290.55 (061°-240°) 125.35 281.5 (241°-060°)	BRADLEY TOWER 120.3 351.8	GND CON 121.9 348.6

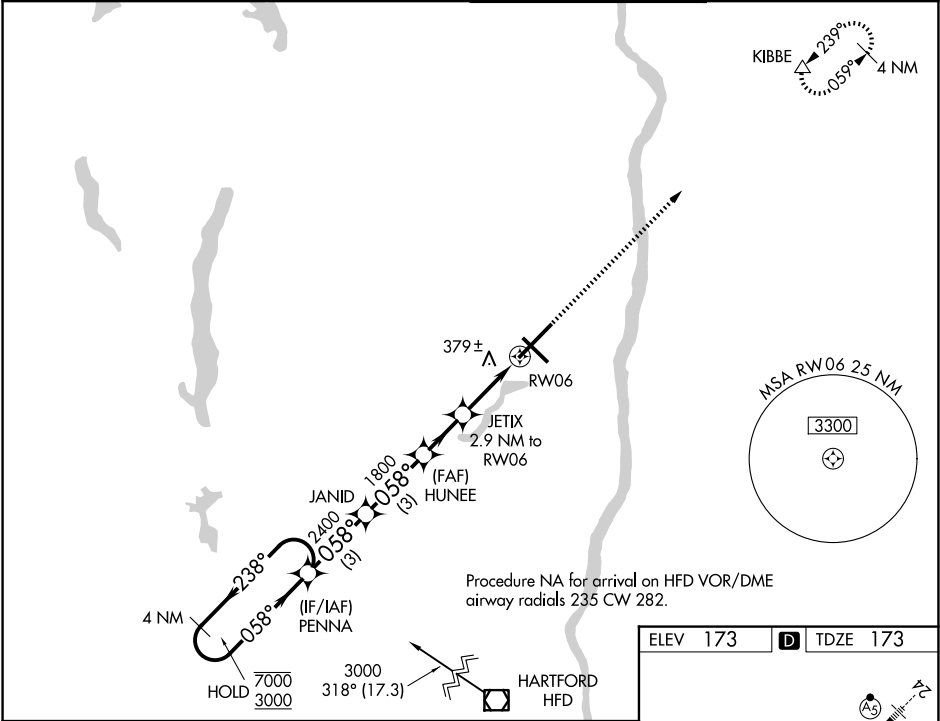

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).			
PENNA		JANID	HUNEE	JETIX	KIBBE
7000 ← 238°			1800	2.9 NM to RWY06	3000
3000 → 058°			2400	1.2 NM to RWY06	△
GP 3.00° TCH 54			1800		
		3 NM	3 NM	2 NM	1.7 NM
CATEGORY	A	B	C	D	
LPV DA	373/18 200 (300-½)				
LNAV/VNAV DA	640/50 467 (500-1)				
LNAV MDA	640/24	467 (500-½)	640/50	467 (500-1)	
CIRCLING	700-1	527 (600-1)	1120-2¾ 947 (1000-2¾)	1220-3 1047 (1100-3)	

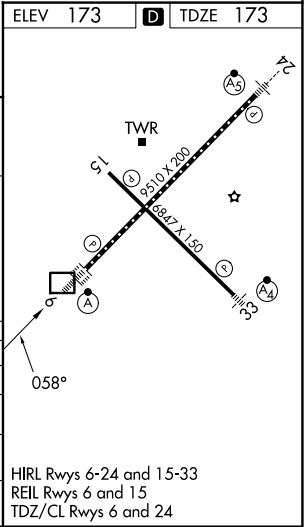

NE-1, 27 NOV 2025 to 25 DEC 2025

NE-1, 27 NOV 2025 to 25 DEC 2025