



WAAS CH 82400 W19A	APP CRS 190°	Rwy Idg 5036 TDZE 19 Apt Elev 22
--	------------------------	---

RNAV (GPS) RWY 19

CAPE MAY COUNTY (WWD)

RNP APCH.	MISSED APPROACH: Climb to 2500 direct SEWEL and hold, continue climb-in-hold to 2500.
▼ ▲	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Circling NA for Cats C and D NE of Rwy 19 and 28. Rwy 19 helicopter visibility reduction below 1 SM NA. Circling Rwy 1 NA at night.

AWOS-3PT 118.275	ATLANTIC CITY APP CON 124.6 327.125	CLNC DEL 121.7	UNICOM 122.7 (CTAF) 0
----------------------------	---	--------------------------	---------------------------------

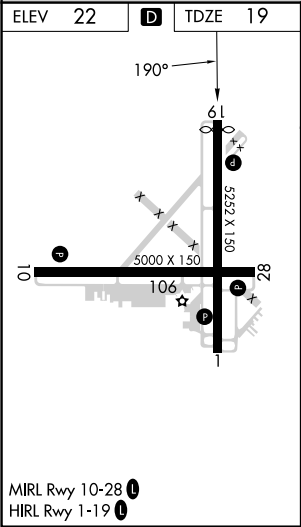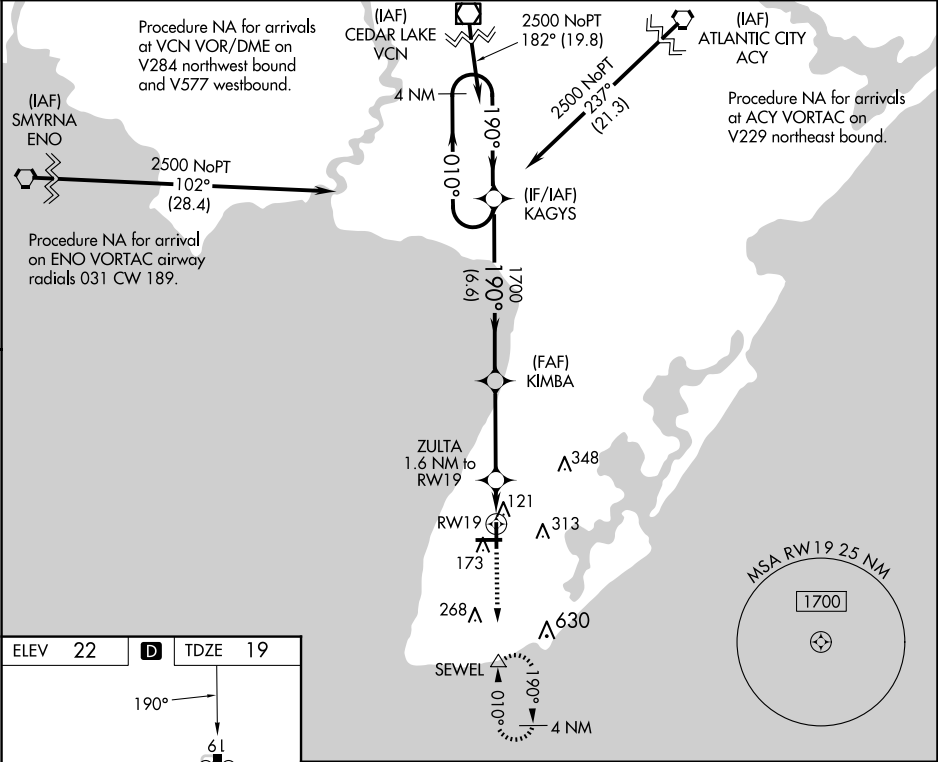

2500 ↑ *LNAV only.		SEWEL △		4 NM Holding Pattern	
RW19 1.6 NM to RW19		ZULTA 1700		KIMBA 1700	
*560		190°		010° → ← 190°	
GP 3.00° TCH 40		2500			
1.6		3.6 NM		6.6 NM	
CATEGORY		A		B	
LPV DA		269-1		250 (300-1)	
LNAV/VNAV DA		392-1¼		373 (400-1¼)	
LNAV MDA		380-1		361 (400-1)	
CIRCLING		480-1 458 (500-1)		620-1 598 (600-1)	
		620-1½ 598 (600-1½)		980-3 958 (1000-3)	