

LOC I-CDR 110.9	APP CRS 028°	Rwy ldg TDZE Apt Elev 5211 3294 3298
---------------------------	------------------------	--

ILS or LOC RWY 3
CHADRON MUNI (CDR)



ADF required.

When local altimeter setting not received, use Pine Ridge altimeter setting and increase S-ILS 3 DA to 3564 feet; increase all MDAs 80 feet and S-LOC 3 visibility Cat C/D ¼ SM, and Circling visibility Cat B/C ¾ SM. Inop table does not apply to S-ILS 3 all Cats, S-LOC 3 Cats A and B. For inop ALS, increase S-LOC 3 Cats C and D visibility to 1½ SM. When using Pine Ridge altimeter setting, inop table does not apply to S-ILS 3 all Cats, S-LOC 3 Cat A. For inop ALS when using Pine Ridge altimeter setting, increase S-LOC 3 Cat B visibility to 1¼ SM, Cats C and D visibility to 2 SM.

MALSRL

MISSED APPROACH:
Climb to 5100 then
climbing right turn to
6200 direct DAWES
LOM and hold.

ASOS 118.05	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF)
-----------------------	--------------------------------------	-------------------------------

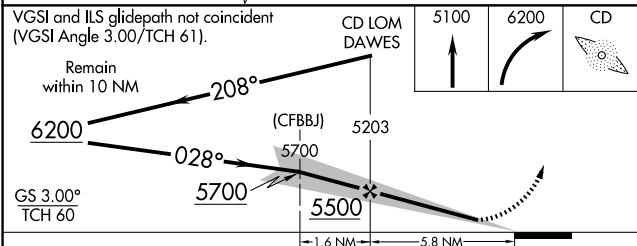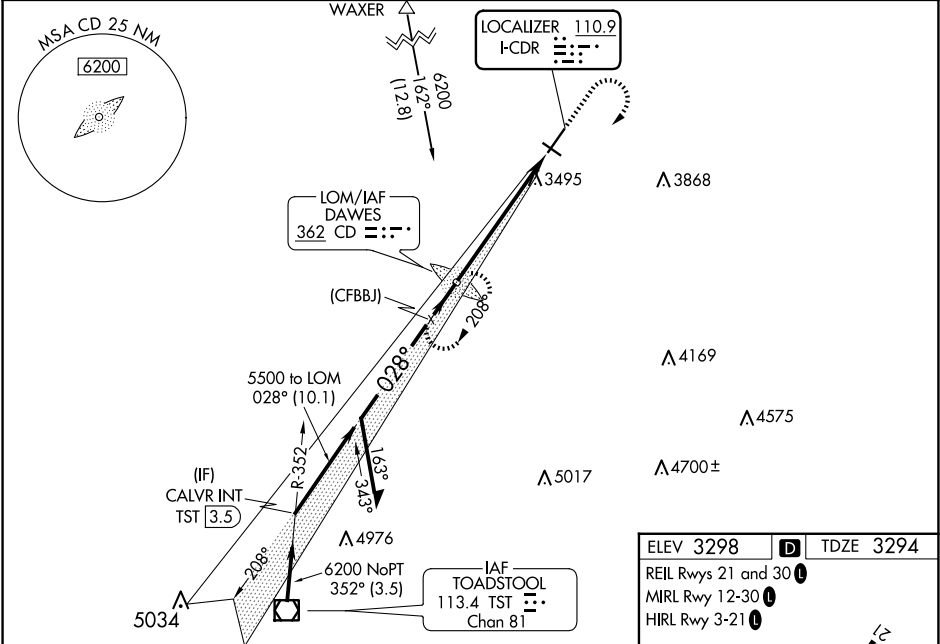

ELEV 3298	TDZE 3294
REIL Rwy 21 and 30	
MIRL Rwy 12-30	
HIRL Rwy 3-21	
FAF to MAP 5.8 NM	
Knots	60 90 120 150 180
Min:Sec	5:48 3:52 2:54 2:19 1:56

NC-2, 27 NOV 2025 to 25 DEC 2025

NC-2, 27 NOV 2025 to 25 DEC 2025