

WAAS CH 66041 W06A	APP CRS 057°	Rwy Ldg 10000 TDZE 1103 Apt Elev 1159
--	------------------------	--

RNAV (GPS) Z RWY 6
SAN BERNARDINO INTL (SBD)

RNP APCH


▼

⚠

Circling NA northwest of Rwy 6-24. When local altimeter setting not received, use Ontario altimeter setting and increase DA to 1426 feet and all visibilities ¼ SM; increase all MDA 80 feet and LNAV Cats C/D and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 2000 then climbing right turn to 6000 direct PDZ VORTAC and hold, continue climb-in-hold to 6000.
Missed approach requires minimum climb of 340 feet per NM to 4000; if unable to meet climb gradient, see RNAV (GPS) Y RWY 6.

D-ATIS 124.175	SOCAL APP CON 127.0 318.2	SAN BERNARDINO TOWER ★ 119.45 (CTAF) 0	GND CON 121.8	UNICOM 122.975
--------------------------	-------------------------------------	--	-------------------------	--------------------------

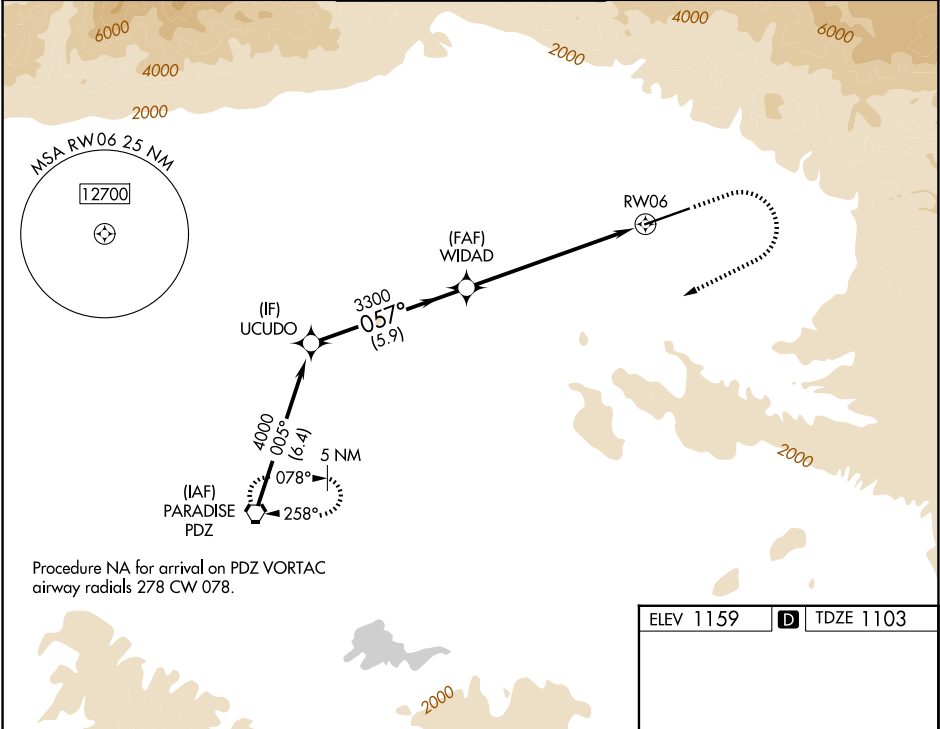

Procedure NA for arrival on PDZ VORTAC
airway radials 278 CW 078.

ELEV 1159 **D** TDZE 1103

UCUDO

WIDAD

2000

6000

PDZ

4000

GP 3.00°

TCH 51

3300

057°

5.9 NM

4.9 NM

1.9 NM

* 1.9 NM to RWY 06

* LNAV only

RWY 06

TWR

0.7% UP

0.8% DOWN

10000 X 200

057°

CATEGORY	A	B	C	D
LPV DA#	1353-¾ 250 (200-¾)			
LNAV MDA#	1740-1 637 (600-1)		1740-1¾ 637 (600-1¾)	
CIRCLING	1740-1 581 (600-1)		1760-1¾ 2640-3 601 (700-1¾) 1481 (1500-3)	

HIRL Rwy 6-24 0

REIL Rwy 6 and 24 0