

DOVER, DELAWARE

ILS or LOC or RNAV (GPS) RWY 1

DOVER AFB (KDOV)

WAAS CH 52207 W01A	APCH CRS 015°	Rwy Idg 9602 TDZE 25 Arpt Elev 29
--	-------------------------	--

[USAF]

RNP APCH. RNAV1-GPS or RADAR required for ILS, LOC.


ALSF-2

MISSED APPROACH: Climb to 2000 direct NOVTE and hold.


ALTERNATE MISSED APPROACH: Fly runway heading, climb and maintain 2000, expect radar vectors from ATC.

- T** * When TDZL/CL inop, increase RVR to 24, RVR of 18 authorized with use of FD or AP or HUD to 24.
When ALS inop, increase RVR to 40, vis to $\frac{3}{4}$ mile.
- **** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to $\frac{1}{8}$ miles.
- ***** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to $\frac{1}{8}$ miles.


ATIS	APP CON		TOWER	GND CON		CLNC DEL	
127.825 273.5	132.425	257.875	126.35 279.625	118.875	225.4	125.55	289.4

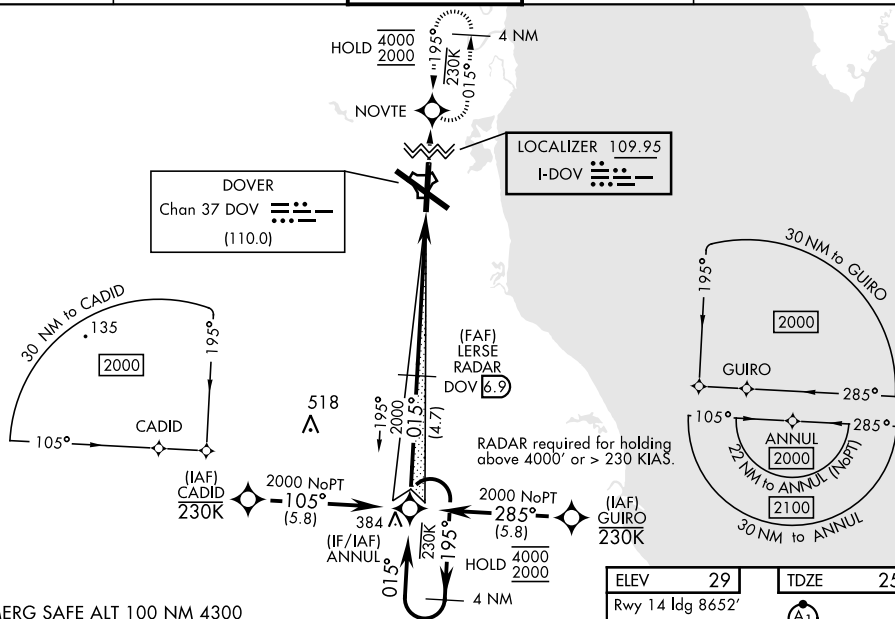

EMERG SAFE ALT 100 NM 4300

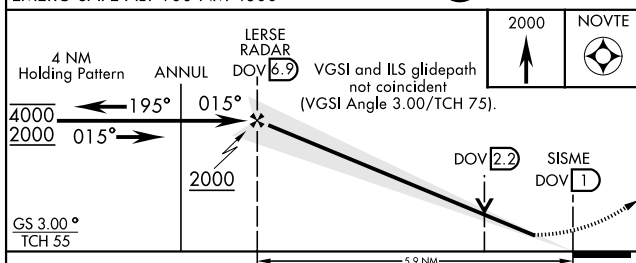

CATEGORY	A	B	C	D	E
S-ILS 1 *	225/18		200	(200-½)	
LPV DA *	225/18		200	(200-½)	NA
S-LOC 1 **	500/24	475 (500-½)	500/50		475 (500-1)
LNAV MDA ***	500/24	475 (500-½)	500/50	475 (500-1)	NA
CIRCLING	540-1	511 (600-1)	620-1½ 591 (600-1½)	620-2 591 (600-2)	1080-3 1051 (1100-3)

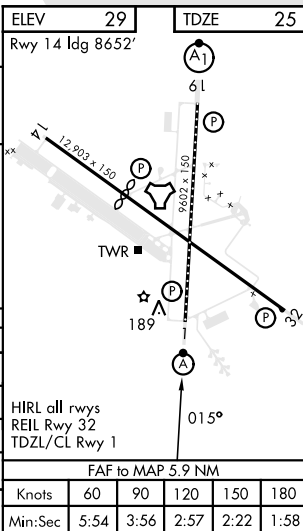

DOVER, DELAWARE

39°08'N-75°28'W

DOVER AFB (KDOV)

Amdt 2 26DEC24

ILS or LOC or RNAV (GPS) RWY 1

NE-3, 27 NOV 2025 to 25 DEC 2025

NE-3, 27 NOV 2025 to 25 DEC 2025