


APP CRS	Rwy Ldg	10526
079°	TDZE	2157
	Apt Elev	2181

RNAV (RNP) RWY 8R
HARRY REID INTL (LAS)

RNP AR APCH. RF required.			MISSED APPROACH: Climb to 7000 on the RNAV missed approach route to VMPRE and hold, continue climb-in-hold to 7000.		
▼ For uncompensated Baro-VNAV systems, procedure NA below 0°C or above 54°C.					
D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER	GND CON	CLNC DEL	CPDLC
132.4	125.025 379.15 (West) 119.775 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R	118.0	

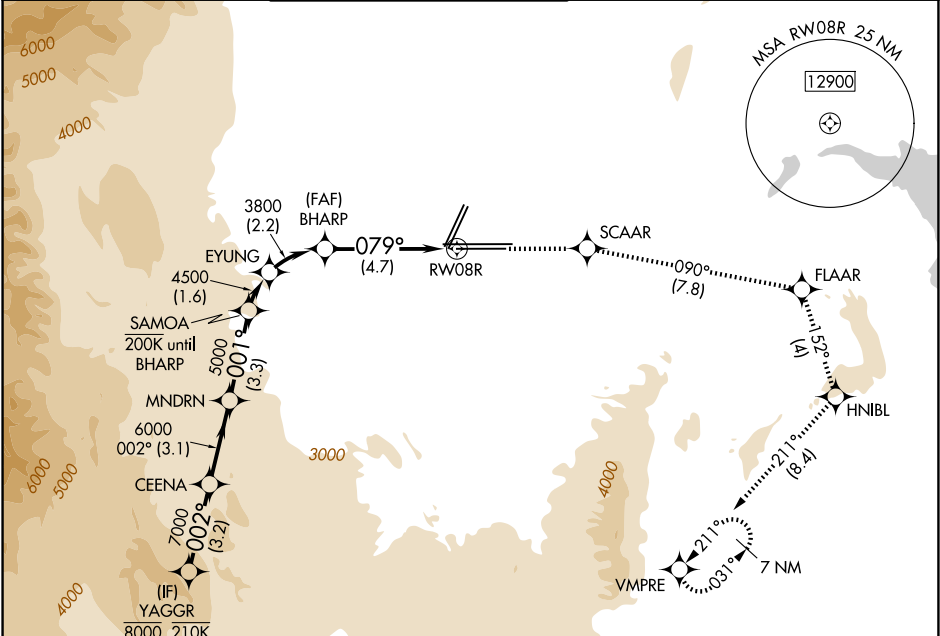

		ELEV 2181		D TDZE 2157	
YAGGR		7000 ↑	SCAAR ✧	tr 090° ✧	FLAAR ✧
				tr 152° ✧	HNIBL ✧
					tr 211° ✧
					VMPRE ✧

GP 3.15° TCH 60		CEENA	MNDRN	SAMOA	EYUNG	BHARP	RW08R
8000		002°	7000	001°	6000	5000	4500
						3800	079°
← 3.2 NM		← 3.1 NM	← 3.3 NM	← 1.6 NM	← 2.2 NM	← 4.7 NM	

CATEGORY	A	B	C	D
RNP 0.10 DA	2544-1 1/8 387 (400-1 1/8)			
RNP 0.30 DA	2613-1 3/8 456 (500-1 3/8)			

AUTHORIZATION REQUIRED

MIRL Rwy 1R-19L

REIL Rwys 1R, 8R, 19L and 19R

HIRL Rwys 1L-19R, 8L-26R and 8R-26L