

WAAS CH 56629 W33A	APP CRS 326°	Rwy Ldg 3327 TDZE 66 Apt Elev 67
--	------------------------	---

RNAV (GPS) RWY 33
MARTHA'S VINEYARD (MVY)

RNP APCH.

▼ Baro-VNAV NA when using Hyannis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. Rwy 33 helicopter visibility reduction below ¾ SM. **▲** NA. When local altimeter setting not received, use Hyannis altimeter setting and increase LPV DA to 370 feet, LNAV/VNAV DA to 393 feet, and all visibilities ½ SM. increase all MDA 60 feet and Cat C and D visibilities ¼ SM. Circling Rwy 15 NA at night. VDP NA with Hyannis altimeter setting.

MISSED APPROACH:
Climb to 1400 then
climbing left turn to
2000 direct BENNT
and hold.

ATIS 126.25	BOSTON APP CON 133.75	VINEYARD TOWER ★ 121.4 (CTAF) 0	GND CON 124.35	UNICOM 122.95
-----------------------	---------------------------------	---	--------------------------	-------------------------

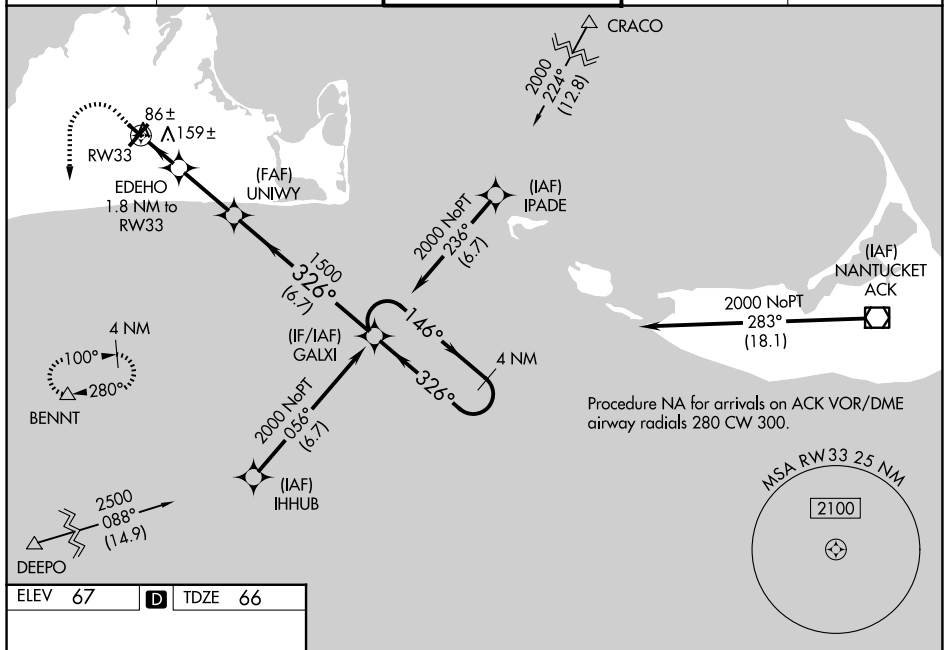


Diagram illustrating a 4 NM Holding Pattern. The pattern is defined by a series of turns: 326°, 146°, and 326°. The pattern is 4 NM wide. The holding pattern is centered on the 1500 foot altitude. The diagram also shows the approach path, the runway (RW33), and the holding pattern (GP 3.00° TCH 40°).