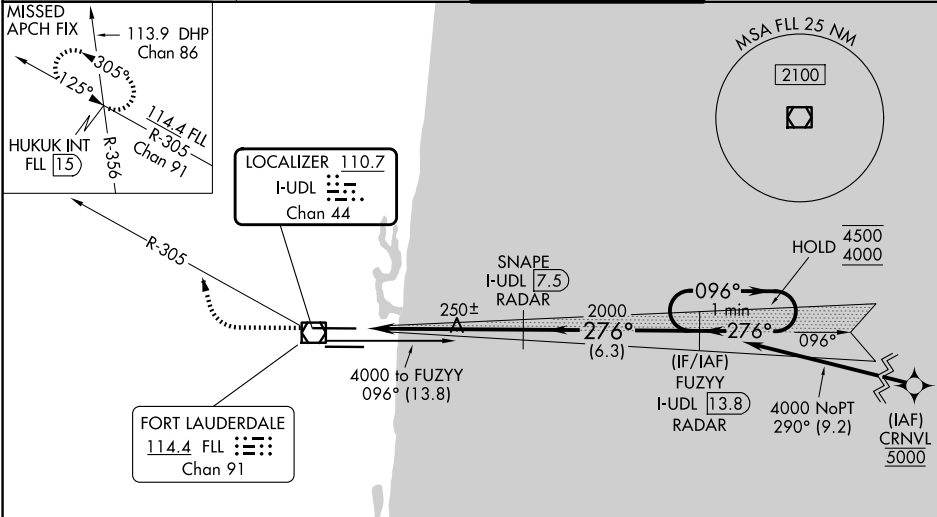




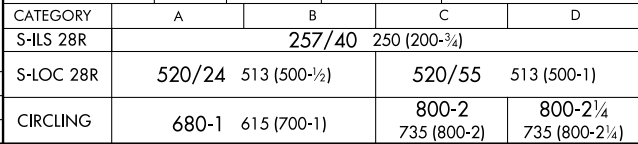
LOC/DME I-UDL 110.7 Chan 44	APP CRS 276°	Rwy Ldg TDZE Apt Elev 8394 7 65
---	------------------------	---

ILS or LOC RWY 28R
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

DME or RADAR required. RNP APCH - GPS from CRNVL.	MALSR 	MISSED APPROACH: Climb to 800 then climbing right turn to 4000 on FLL VOR/DME R-305 to HUKUK INT/FLL 15 DME and hold, continue climb-in-hold to 4000.
 Simultaneous approach authorized. Inop table does not apply to S-ILS 28R. For inop ALS, increase S-LOC 28R Cats C and D visibility to 1 3/8 SM.		

D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4
------------------------	---------------------------------------	---	-------------------------



ELEV 65 D TDZE 7				
HIRL Rwy 10L-28R and 10R-28L FAF to MAP 6.1 NM		VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 69). FUZZY I-UDL 13.8 RADAR		
				
Knots 60 90 120 150 180 Min:Sec 6:06 4:04 3:03 2:26 2:02		CATEGORY A B C D S-ILS 28R 257/40 250 (200-3/4) S-LOC 28R 520/24 513 (500-1/2) 520/55 513 (500-1) CIRCLING 680-1 615 (700-1) 800-2 735 (800-2) 800-2 735 (800-2 1/4)		

SE-3, 27 NOV 2025 to 25 DEC 2025

SE-3, 27 NOV 2025 to 25 DEC 2025