


WAAS CH 87101 W18A	APP CRS 176°	Rwy Ldg TDZE 199 Apt Elev 203
--	------------------------	---

RNAV (GPS) RWY 18
VALDOSTA RGNL (VLD)

RNP APCH - GPS.	Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C.	MISSED APPROACH: Climb to 2700 direct VCATS and hold.
-----------------	---	---

ASOS 126.225	VALDOSTA APP CON ★ 126.6 285.6	VALDOSTA TOWER ★ 128.35 (CTAF) 0	GND CON 121.7	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

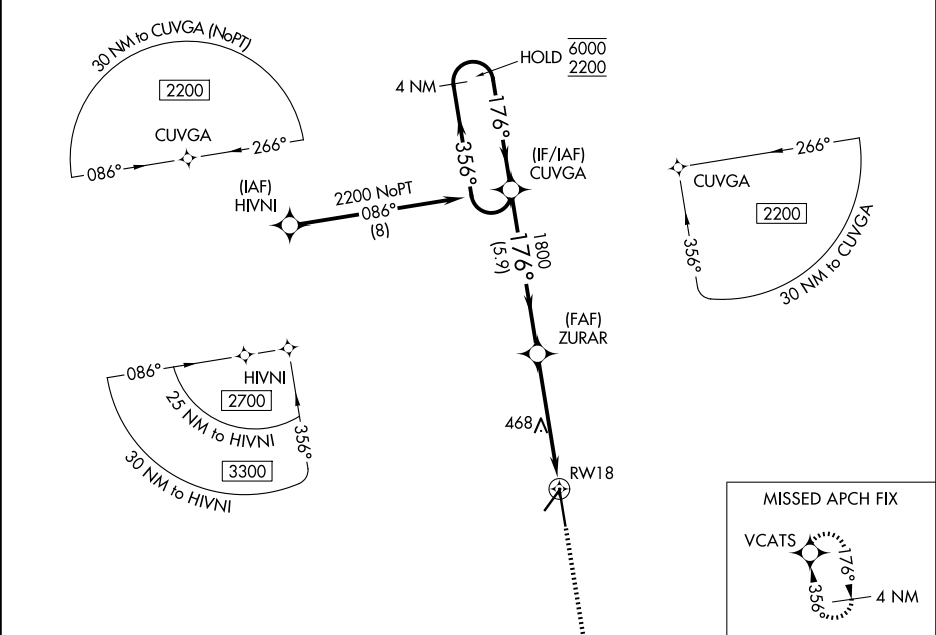

ELEV 203 D TDZE 199				
4 NM Holding Pattern CUVGA 2700 VCATS				
6000 ← 356° 2200 → 176° GP 3.00° TCH 50 ZURAR 1800 1.5 NM to RW18 RW18 5.9 NM 3.4 NM 1.5 NM				
CATEGORY	A	B	C	D
LPV DA	454-¾ 255 (300-¾)			
LNAV/VNAV DA	458-¾ 259 (300-¾)			
LNAV MDA	720-1	521 (600-1)	720-1½	521 (600-1½)
CIRCLING	720-1	517 (600-1)	900-2 697 (700-2)	1020-2¾ 817 (900-2¾)
REIL Rwy 18 1 HIRL Rwy 18-36 1 REIL Rwy 4 and 22 MIRL Rwy 4-22				

SE-4, 27 NOV 2025 to 25 DEC 2025

SE-4, 27 NOV 2025 to 25 DEC 2025