

|                                                 |                        |                                                 |
|-------------------------------------------------|------------------------|-------------------------------------------------|
| LOC/DME I-EKI<br><b>110.3</b><br>Chan <b>40</b> | APP CRS<br><b>312°</b> | Rwy Ldg<br>TDZE <b>43</b><br>Apt Elev <b>46</b> |
|-------------------------------------------------|------------------------|-------------------------------------------------|

LOC RWY 31

CORPUS CHRISTI INTL (CRP)


DME or RADAR required.  
RADAR required for procedure entry at ZULEX.  

For inop ALS, increase S-LOC 31 Cts C, D, and E  
visibility to 1 SM.

MALSRR  
AS

MISSED APPROACH: Climb to 700 then climbing right  
turn to 2000 on heading 335° and CRP VORTAC  
R-287 to ATHIS INT/CRP VORTAC 23.3 DME and hold.

|                      |                                        |                                    |                                |                           |
|----------------------|----------------------------------------|------------------------------------|--------------------------------|---------------------------|
| ATIS<br><b>126.8</b> | CORPUS APP CON<br><b>120.9 348.725</b> | CORPUS TOWER<br><b>119.4 257.8</b> | GND CON<br><b>121.9 269.15</b> | CLNC DEL<br><b>118.55</b> |
|----------------------|----------------------------------------|------------------------------------|--------------------------------|---------------------------|

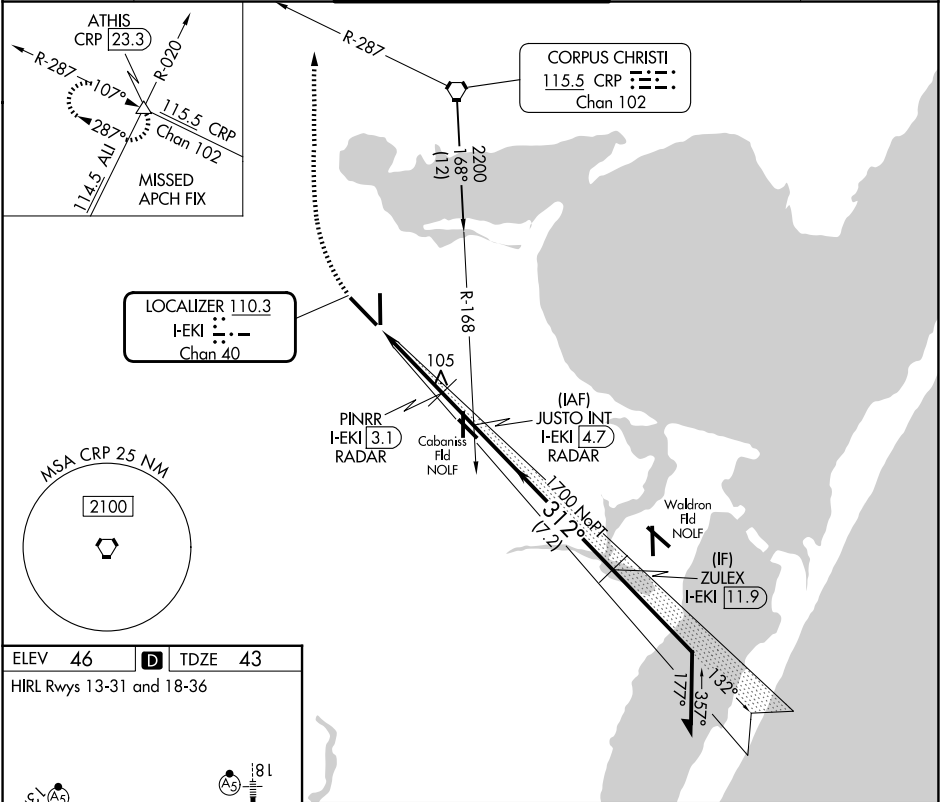

ELEV **46** **D** TDZE **43**  
HIRL Rwy's 13-31 and 18-36

|                   |      |      |      |      |      |
|-------------------|------|------|------|------|------|
| FAF to MAP 5.1 NM |      |      |      |      |      |
| Knots             | 60   | 90   | 120  | 150  | 180  |
| Min:Sec           | 5:06 | 3:24 | 2:33 | 2:02 | 1:42 |

700 2000 ATHIS  
↑ hdg 335° CRP R-287 △

JUSTO INT I-EKI 4.7 RADAR

2200 132° 2000

312° 1700

Remain within 15 NM

VGSI and descent angles not coincident (VGSI Angle 3.00/ TCH 50).

I-EKI DME Antenna I-EKI 0.3 I-EKI 0.6 3.35° TCH 50

PINRR I-EKI 3.1 RADAR

1 2.5 NM 1.6 NM

|          |                       |                       |                           |                           |                           |
|----------|-----------------------|-----------------------|---------------------------|---------------------------|---------------------------|
| CATEGORY | A                     | B                     | C                         | D                         | E                         |
| S-31     | 400-1/2 357 (400-1/2) | 400-5/8 357 (400-5/8) | 820-2 1/4 820-2 1/2       | 820-2 1/2 820-2 3/4       | 820-2 3/4 774 (800-2 3/4) |
| CIRCLING | 500-1 454 (500-1)     | 780-1 734 (800-1)     | 820-2 1/4 774 (800-2 1/4) | 820-2 1/2 774 (800-2 1/2) | 820-2 3/4 774 (800-2 3/4) |

SC-3, 27 NOV 2025 to 25 DEC 2025

SC-3, 27 NOV 2025 to 25 DEC 2025