
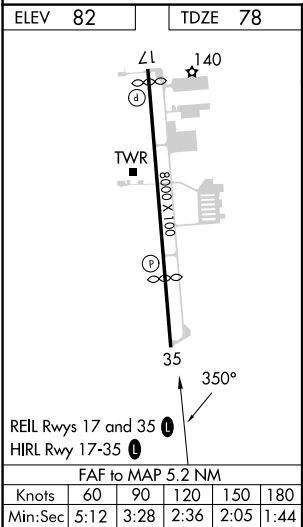



LOC/DME I-TXH 110.7 Chan 44	APP CRS 350°	Rwy Idg 6016 TDZE 78 Apt Elev 82
---	------------------------	---

ILS or LOC RWY 35
SUGAR LAND RGNL (SGR)

DME required. RADAR required for procedure entry.	MISSED APPROACH: Climb to 900 then climbing left turn to 2000 on I-TXH localizer south course to HULLO/I-TXH 6.3 DME and hold.
VDP NA when using William P Hobby altimeter setting. When local altimeter setting not received, use William P Hobby altimeter setting and increase all DA 51 feet and all MDA 60 feet and S-LOC 35 Cat C/D visibility 1/8 mile, and Circling Cat C/D visibility 1/4 mile.	

ATIS 118.125	HOUSTON APP CON 123.8 257.7	SUGAR LAND TOWER* 118.65 (CTAF) 0	GND CON 121.4	CLNC DEL 121.4	CLNC DEL 119.25 (when twr closed)	UNICOM 122.95
------------------------	---------------------------------------	--	-------------------------	--------------------------	--	-------------------------

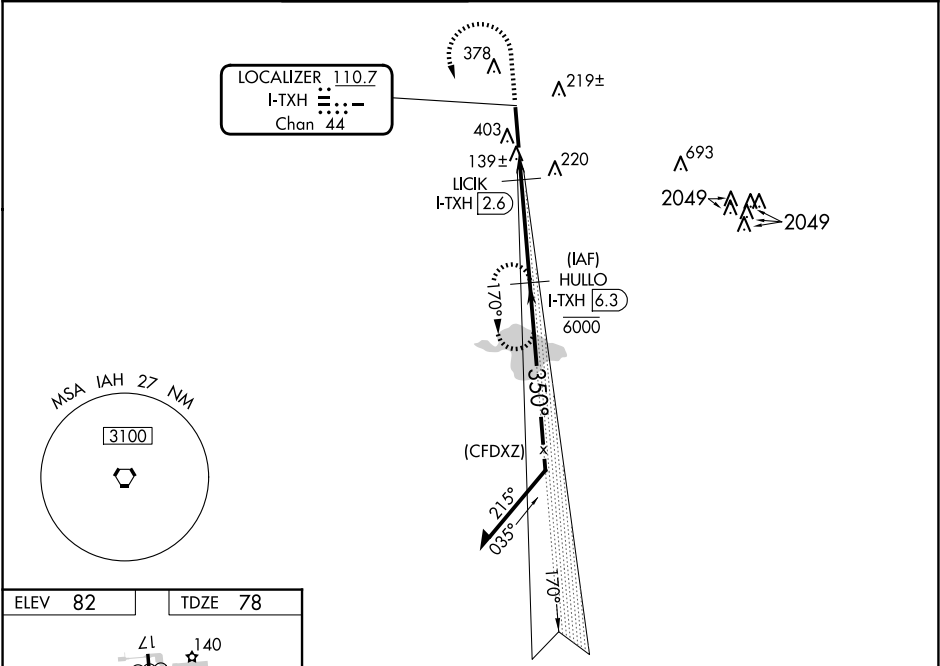

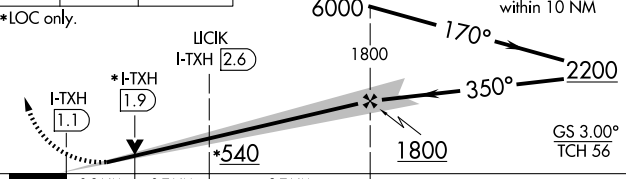900 ↑	2000 I-TXH S crs	HULLO I-TXH 6.3	*600 when using William P Hobby altimeter setting.																					
*LOC only.																								
<table><tr><td>CATEGORY</td><td>A</td><td>B</td><td>C</td><td>D</td></tr><tr><td>S-ILS 35</td><td></td><td>278-3/4</td><td>200 (200-3/4)</td><td></td></tr><tr><td>S-LOC 35</td><td></td><td>400-1</td><td>322 (400-1)</td><td></td></tr><tr><td>CIRCLING</td><td>720-1</td><td>638 (700-1)</td><td>720-1 3/4 638 (700-1 3/4)</td><td>720-2 638 (700-2)</td></tr></table>					CATEGORY	A	B	C	D	S-ILS 35		278-3/4	200 (200-3/4)		S-LOC 35		400-1	322 (400-1)		CIRCLING	720-1	638 (700-1)	720-1 3/4 638 (700-1 3/4)	720-2 638 (700-2)
CATEGORY	A	B	C	D																				
S-ILS 35		278-3/4	200 (200-3/4)																					
S-LOC 35		400-1	322 (400-1)																					
CIRCLING	720-1	638 (700-1)	720-1 3/4 638 (700-1 3/4)	720-2 638 (700-2)																				