

WAAS CH 72704 W13A	APP CRS 133°	Rwy Ldg 4300 TDZE 896 Apt Elev 897
--	------------------------	---

RNAV (GPS) RWY 13


CROOKSTON MUNI/KIRKWOOD FLD (CKN)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA to Rwys 17 and 35. Baro-VNAV and VDP NA when using GFK altimeter setting. When local altimeter setting not received, use GFK altimeter setting and increase LPV DA to 1159 feet. Increase LNAV/VNAV DA to 1347 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C ½ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct FAPVU and hold.

AWOS-3 126.425	GRAND FORKS APP CON★ 118.1 318.1	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

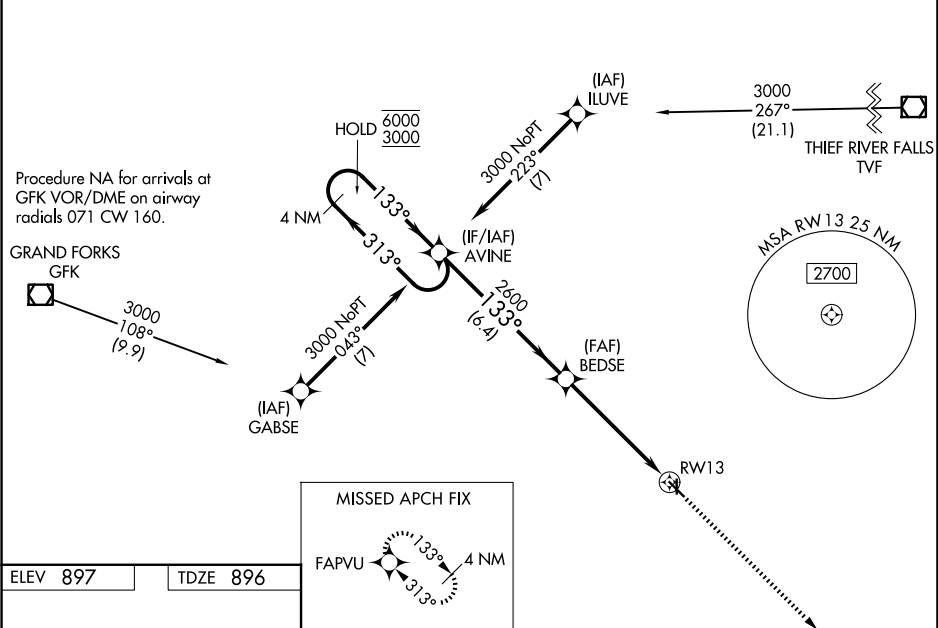

REIL Rwys 13 and 31 **L**
 MRL Rwy 13-31 **L**

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).

4 NM Holding Pattern

6000 ← 313°
 3000 → 133°

GP 3.00°
 TCH 40

AVINE

BEDSE

2600

1.3 NM to RW13

RW13

6.4 NM

3.9 NM

1.3

CATEGORY	A	B	C	D
LPV DA	1096-1 200 (200-1)			NA
LNAV/VNAV DA	1284-1½ 388 (400-1½)			NA
LNAV MDA	1340-1 444 (500-1)	1340-1¾ 444 (500-1¾)		NA
CIRCLING	1340-1 443 (500-1)	1360-1 463 (500-1)	1480-1½ 583 (600-1½)	NA

3000 ↑

FAPVU