
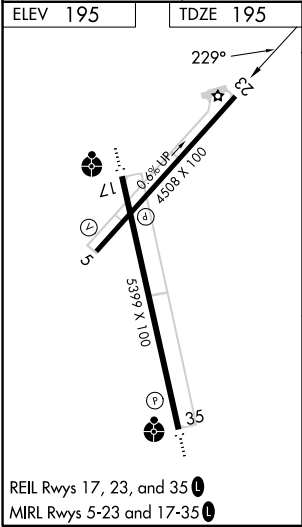


WAAS CH 99318	APP CRS 229°	Rwy Idg 4508 TDZE 195 Apt Elev 195
W23A		

RNAV (GPS) RWY 23

ORANGEBURG MUNI (OGB)

RNP APCH-GPS. ▼ ▲ Circling Rwy 17 NA at night. Baro-VNAV and VDP NA when using Columbia Metro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. When local altimeter setting not received, use Columbia Metro altimeter setting: increase LPV DA to 538 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 740 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cats C and D ¼ SM.		MISSED APPROACH: Climb to 2000 direct GACEC and hold.	
ASOS 118.525	COLUMBIA APP CON 124.15 338.2	GCO 125.675	UNICOM 122.7 (CTAF) 0

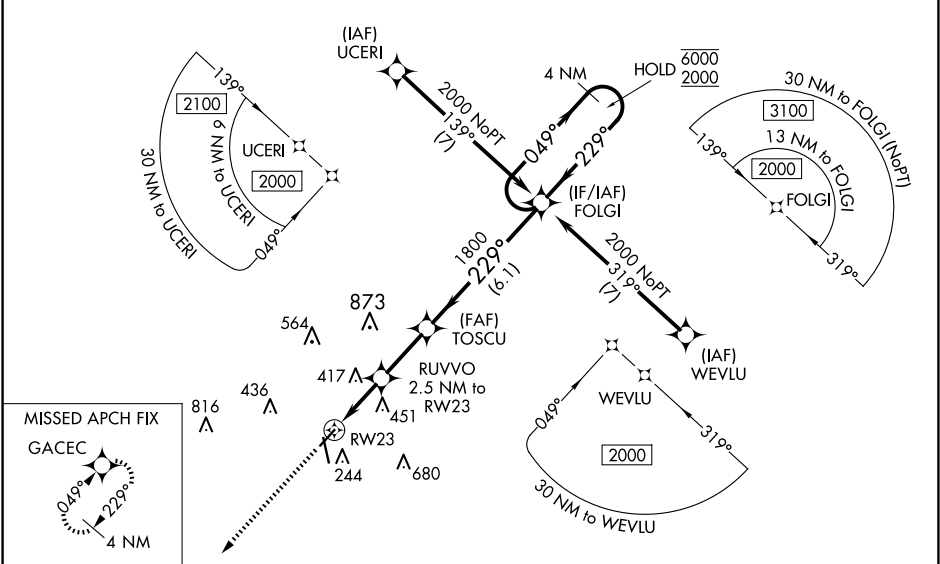

ELEV 195	TDZE 195
2000 GACEC	
4 NM Holding Pattern FOLGI 049° → 6000 ← 229° 2000 GP 3.00° TCH 40	
1.3 1.2 NM 2.5 NM 6.1 NM	
CATEGORY	A B C D
LPV DA	459-7⁄8 264 (300-7⁄8)
LNAV/VNAV DA	660-1³⁄⁸ 465 (500-1³⁄⁸)
LNAV MDA	660-1 465 (500-1) 660-1³⁄⁸ 465 (500-1³⁄⁸)
CIRCLING	680-1 740-1 980-2¼ 980-2½
	485 (500-1) 545 (600-1) 785 (800-2¼) 785 (800-2½)